

MATTHEWS



FAN COMPANY

PRODUCT CATALOG
Volume IV



Matthews Fan Company has been at the forefront of bringing unique ceiling, wall and portable fan products to both the residential and commercial markets since 1992.

Our innovative fans combine traditional, contemporary and industrial designs, retrospective elements and always high performance.

Matthews proudly integrates American parts and labor into the production of all of our products.

Visit one of our retailer partners or contact us for more information regarding our quality products and customization.

Tel: 847-680-9043

Fax: 847-680-8140

www.MatthewsFanCo.com



An aerial photograph of a dense evergreen forest, likely spruce or fir, with a variety of green shades from deep forest green to lighter, yellowish-green at the tips of the trees. The word "GREEN" is superimposed in the upper center in a large, white, bold, sans-serif font.

GREEN

MATTERS

Matthews' fans achieve some of the highest efficiency ratings in the industry through:

- DC Motor technology allows for large, powerful blades which provide more robust airflow and ultra-quiet operation.
- Rotational fans reduce HVAC costs by mixing ambient air more thoroughly.
- Directional and Wall fans provide columnar airflow which can be customized.

Matthews does not field destroy

- 95% of damaged and defective materials are recycled or re-purposed.

Matthews achieves low defect rates because:

- All fans are visually inspected before shipping.
- All rotational and oscillating fans are bench tested before shipping.

QUICK REFERENCE PAGE

ATLAS

MODEL	MODEL CODE	DIAMETER	MOTOR TYPE	REMOTE	WALL CONTROL	ENVIRONMENT RATING	LIGHT KIT	UNIPAK
ACQUA	AQ	38" (WOOD) 36" (METAL)	AC	AT-RC-AC-CEILING-AQ	AT-AC-WC-AQ	DAMP	YES	YES
ALESSANDRA	AK	42",56",72"	DC	AT-RC-DC-CEILING-AK	AT-DC-WC-AK	WET	NO	YES**
ALESSANDRA-LK	AKLK	42",56",72"	DC	AT-RC-DC-CEILING-AKLK	AT-DC-WC-AK	WET	YES	YES**
ALESSANDRA TROPICALE	AKTP	48"	DC	AT-RC-DC-CEILING-AKTP	AT-DC-WC-AK	WET	NO	NO
ALESSANDRA TROPICALE - LK	AKTPLK	48"	DC	AT-RC-DC-CEILING-AKTPLK	AT-DC-WC-AK	WET	YES	NO
ARIELLA	AN	64"	DC	AT-RC-DC-CEILING-AN	AT-DC-WC-AK	WET	NO	YES
ARIELLA-LK	ANLK	64"	DC	AT-RC-DC-CEILING-ANLK	AT-DC-WC-AK	WET	YES	YES
DAGNY	DG	41" (WOOD) 39" (METAL)	AC	AT-RC-AC-CEILING-DG	AT-DC-WC-AQ	DAMP	NO	YES
DAGNY-LK	DGLK	41" (WOOD) 39" (METAL)	AC	AT-RC-AC-CEILING-DGLK	AT-DC-WC-AQ	DAMP	YES	YES
DIANE	DI	16" (WOOD) 13" (METAL)	AC	AT-RC-AC-CEILING-DI	AT-DC-WC-ME	DAMP	NO	YES
DONAIRE	DA	52"	AC	AT-RC-AC-CEILING-DA	AT-DC-WC-DA	WET-COASTAL	YES	YES
ELIZA	EK	56"	DC	AT-RC-DC-CEILING-EK	AT-DC-WC-AK	WET	NO	YES
ELIZA-H	EKH	56"	DC	AT-RC-DC-CEILING-EKH	AT-DC-WC-AK	DAMP	NO	YES
IRENE-3	IR3	42",52",60",72"	DC	AT-RC-DC-CEILING-IR3	AT-DC-WC-AK	DAMP	NO	NO
IRENE-3H	IR3H	42",52",60",72"	DC	AT-RC-DC-CEILING-IR3H	AT-DC-WC-AK	DAMP	NO	NO
IRENE-3HLK	IR3HLK	42",52",60"	DC	AT-RC-DC-CEILING-IR3HLK	AT-DC-WC-AK	DAMP	YES	NO
IRENE-5	IR5	42",52",60"	DC	AT-RC-DC-CEILING-IR5	AT-DC-WC-AK	DAMP	NO	NO
IRENE-5H	IR5H	42",52",60"	DC	AT-RC-DC-CEILING-IR5H	AT-DC-WC-AK	DAMP	NO	NO
IRENE-5HLK	IR5HLK	42",52",60"	DC	AT-RC-DC-CEILING-IR5HLK	AT-DC-WC-AK	DAMP	YES	NO
KAYE	KC	13"	AC	AT-RC-AC-CEILING-DI	AT-DC-WC-ME	DAMP	NO	YES
LAURA	LL	16"	DC	AT-RC-DC-CEILING-LL	AT-DC-WC-LL	DAMP	NO	YES
LINDSAY	LW	52"	DC	AT-RC-DC-CEILING-LW	AT-DC-WC-AK	DAMP	YES	YES
MELODY	ME	13"	AC	AT-RC-AC-CEILING-DI	AT-DC-WC-ME	DAMP	NO	YES
MOLLY	MK	56"	DC	AT-RC-DC-CEILING-MK	AT-DC-WC-AK	WET	NO	YES
MOLLYWOOD	MW	42",52",60"	DC	AT-RC-DC-CEILING-MW	AT-DC-WC-AK	DAMP	NO	NO
NAN	NK	42",52",60"	DC	AT-RC-DC-CEILING-NK	AT-DC-WC-AK	DAMP	NO	NO
NAN-XL	NKXL	72"	DC	AT-RC-DC-CEILING-NKXL	AT-DC-WC-AK	DAMP	NO	NO
PATRICIA-3	PA3	42",52",60"	DC	AT-RC-DC-CEILING-PA3	AT-DC-WC-AK	DAMP	YES	NO
PATRICIA-5	PA5	42",52",60"	DC	AT-RC-DC-CEILING-PA5	AT-DC-WC-AK	DAMP	YES	NO
SUPER JANET	SJ	42",52",60"	DC	AT-RC-DC-CEILING-SJ	AT-DC-WC-AK	DAMP	YES	YES**

UNIPAK** = Some blade options may not qualify for UNIPAK shipping on certain fixtures

SKU NAMING CONVENTION FOR ATLAS FANS & ACCESSORIES

DOWNRODS SKU	5" Downrod (Specify Finish)	5DR-XXXX
	10" Downrod (Specify Finish)	10DR-XXXX
	18" Downrod (Specify Finish)	18DR-XXXX
	20" Downrod (Specify Finish)	20DR-XXXX
	24" Downrod (Specify Finish)	24DR-XXXX
	30" Downrod (Specify Finish)	30DR-XXXX
	36" Downrod (Specify Finish)	36DR-XXXX
	48" Downrod (Specify Finish)	48DR-XXXX
	60" Downrod (Specify Finish)	60DR-XXXX
	72" Downrod (Specify Finish)	72DR-XXXX

ATLAS **DR = DOWNROD**
AT-10DR-XXXX
10 = LENGTH **XXXX = FINISH**
 5", 10", 18", 20", 24", 30"
 36", 48", 60" OR 72"

XXXX = ATLAS MOTOR FINISHES

BB - BRUSHED BRONZE
 BK - MATTE BLACK
 BN - BRUSHED NICKEL
 BP - BRUSHED PEWTER
 BRBR - BRUSHED BRASS
 BS - BRUSHED STAINLESS
 BW - BARN WOOD
 CR - POLISHED CHROME
 LM - LIGHT MAPLE
 MWH - MATTE WHITE
 TB - TEXTURED BRONZE
 WH - GLOSS WHITE
 WN - WALNUT

REMOTE CONTROL SKU	AC Motor (Specify Model)	AT-RC-AC-CEILING-XX
	DC Motor (Specify Model)	AT-RC-DC-CEILING-XX

ATLAS **AC OR DC MOTOR**
AT-RC-AC-CEILING-XX
REMOTE CONTROL **XX = MODEL**

WALL CONTROL SKU	AC Motor (Specify Model)	AT-AC-WALL-XX
	DC Motor (Specify Model)	AT-DC-WALL-XX



ATLAS **XX = MODEL**
AT-AC-WALL-XX
AC OR DC MOTOR

CATHEDRAL MOUNT 60° SKU	AT-CathedralMt-XX
-------------------------------	-------------------

ATLAS
AT-CATHEDRALMT-XX
XX = FINISH

QUICK REFERENCE PAGE

STANDARD EQUIPMENT

	ATLAS	MATTHEWS-GERBAR
 CEILING FANS	(1) Field-Cuttable 10" Downrod (1) Slant 30 Degree Ceiling Mount Apparatus (1) Remote Control for AC motor fans (1) Remote Control & (1) White Decora-style Wall Control	(1) Field-Cuttable 10" Downrod (1) Flat Ceiling Mount Apparatus (1) White Decora-style Wall Control
 WALL FANS	(1) Side-mount Junction Box (1) White Decora-style Wall Control (1) Remote Control - Laura fan only	(1) Side-mount Junction Box (1) White Decora-style Wall Control

The Catalog lists standard equipment at the bottom of each fan model page.

MATTHEWS-GERBAR

MODEL	MODEL CODE	DIAMETER	MOTOR TYPE	REMOTE	WALL CONTROL	ENVIRONMENT RATING	LIGHT KIT	UNIPAK
AR RUTHIANE	AR	48" (WOOD)/46" (METAL)	AC	N/A	AT-AQ-WC	DRY / DAMP*	NO	YES
BIANCA DIRECIONAL	BD	16" (WOOD) /13" (METAL)	AC	N/A	AT-ME-WC	DRY / DAMP*	NO	YES
BRISA 2000	B2K	40" (WOOD) /39" (METAL)	AC	N/A	AT-ME-WC	DRY / DAMP*	NO	YES**
BRUNA PAREDE	BP	21" H X 16" PROJECTION	AC	N/A	AT-ME-WC	DRY / DAMP*	NO	YES
DUPLO-DINAMICO	DD	36" (WOOD) /39" (METAL)	AC	N/A	AT-AQ-WC	DRY / DAMP*	NO	YES**
ITALO VENTANIA	IV	62" (WOOD) /60" (METAL)	AC	N/A	AT-AQ-WC	DRY / DAMP*	NP	YES
JAROLD DIRECIONAL	JD	16" (WOOD) /13" (METAL)	AC	N/A	AT-ME-WC	DRY / DAMP*	NO	YES
MICHELLE PAREDE	MP	21" H X 16" PROJECTION	AC	N/A	AT-ME-WC	DRY / DAMP*	NO	YES
VENT-BETTINA	VB	44" (WOOD) / 42" (METAL)	AC	N/A	AT-AQ-WC	DRY / DAMP*	NO	NO

DAMP* = Protection Coating for Damp Non-Coastal Environments, Chlorine and Saltwater Pools

UNIPAK** = Some blade options may not qualify for UNIPAK shipping

SKU NAMING CONVENTION FOR MATTHEWS-GERBAR FANS & ACCESSORIES

DR = DOWNROD

10DR - XXXX

10 = LENGTH

XXXX = FINISH

5", 10", 18", 20", 24", 30", 36", 48", 60" OR 72"

DOWNRODS SKU	
5" Downrod (Specify Finish)	5DR-XXXX
10" Downrod (Specify Finish)	10DR-XXXX
18" Downrod (Specify Finish)	18DR-XXXX
20" Downrod (Specify Finish)	20DR-XXXX
24" Downrod (Specify Finish)	24DR-XXXX
30" Downrod (Specify Finish)	30DR-XXXX
36" Downrod (Specify Finish)	36DR-XXXX
48" Downrod (Specify Finish)	48DR-XXXX
60" Downrod (Specify Finish)	60DR-XXXX
72" Downrod (Specify Finish)	72DR-XXXX

XXXX = MG MOTOR FINISHES

BN - BRUSHED NICKEL
 BK - MATTE BLACK
 BKN - BLACK NICKEL
 BLUE - SAFIRA/BLUE
 BRBR - BRUSHED BRASS
 BRCP - BRUSHED COPPER
 BZZT - BRONZETTE
 CP - POLISHED COPPER
 CR - POLISHED CHROME
 GREEN - ESMERELDA
 LTBLUE - AGUA MARINHA
 LTPURPLE - AMETISTA
 PB - POLISHED BRASS
 RED - RUBI
 WH - GLOSS WHITE

MATTHEWS FAN COMPANY PRODUCTS

ATLAS



Acqua
pg.9-10



Alessandra
pg. 11-12



Alessandra-LK
pg. 13-14



Alessandra Tropical
pg. 15-17



Alessandra Tropical
pg. 18-20



Ariella
pg. 21-23



Ariella-LK
pg. 24-26



Dagny
pg. 27-28



Dagny LK
pg. 29-30



Diane
pg. 31-32



Donaire
pg. 33-34



Eliza
pg. 35-36



Eliza-H
pg. 37-38



Irene-3
pg. 39-41



Irene-3H
pg. 42-44



Irene-3HLK
pg. 45-46



Irene-5
pg. 47-48



Irene-5H
pg. 49-50



Irene-5HLK
pg. 51-52



Kaye
pg. 53-54




Laura
pg. 55-56



Lindsay
pg. 57-58



Melody
pg. 59-60



Molly
pg. 61-62



Mollywood
pg. 63-64



Nan
pg. 65-66



Patrícia-3
pg. 69-70



Nan XL
pg. 67-68



Patrícia-5
pg. 71-72



Super Janet
pg. 73-74

MATTHEWS-GERBAR



Ar Ruthiane
pg. 75-76



Bianca Direcional
pg. 77-78



Brisa 2000
pg. 79-80



Bruna Parede
pg. 81-82



Duplo-Dinamico
pg. 83-84



Italo Ventania
pg. 85-86



Jarold Direcional
pg. 87-88



Michelle Parede
pg. 89-90



Vent-Bettina
pg. 91-92

shown in Textured Bronze
with Metal Blades and
Decorative Cage



Acqua

The Acqua 360° rotational fan is thoughtfully designed to resemble the molecular structure of water, Earth's most precious resource. The Acqua offers fluid lines and quiet axial rotation. Its fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews rotational fans circulate heat and air-conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum and heavy stamped steel, the Acqua carries a limited lifetime warranty.

Product Features



American
Labor



AC
Motor



360°
Rotation



Safety Cage
Compatible



Damp
Location



Soothing
White Noise



LED
Lamp



Remote
Control



29° Slant
Ceiling Canopy



60° Cathedral
Ceiling Canopy



Unipack
Shipping



shown in Textured Bronze
with Barn Wood Blades



shown in Textured Bronze
with Mahogany Blades



shown in Textured Bronze
with Matte Black Blades



shown in Textured Bronze
with Metal Blades and
Decorative Cage

ACQUA

FINISH AND BLADE OPTIONS

SKU#	AQ-XX-XXXX (Model+Finish+Blade)	
Standard Finishes	Textured Bronze	TB
Blade Styles and Material	Solid Wood / Barn Wood Solid Wood / Mahogany Solid Wood / Matte Black Metal w/ Decorative Cage Metal w/ Safety Cage	WDBW WD WDBK MTL MSAF

TECHNICAL SPECS

Fan Weight	27 lbs
Voltage	110 or 220
Motor Type	AC
Rotation	YES
Downrods Lengths <i>Field cuttable</i>	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Overall Drop	16 inches / 41 cm + downrod length
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible
Ambience	Soothing White Noise
Safety Certification	UL / CUL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Head Options	Solid Wood	Metal with Guard
Fan Diameter	39 inches / 99 cm	37 inches / 94 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Safety Cage or Decorative Cage
RPM (Low / High)	721 / 1199	1040 / 1445
CFM (Low / High)	2750 / 4058	1825 / 3167
Watts (High)	101.25	80.50
CFM/Watt (High)	40.80	39.34
Blade Pitch	19°	31°

LIGHT KIT PHOTOMETRICS

Lamping (Replaceable)	GU10 LED
Remote Dimmable	No
Delivered Temperature in K	2969
Delivered Lumens	337.30
CRI	94
Watts	5
Hours	36,000

Light kit longevity if used 6 Hours/Day: 16.5 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Slant ceiling canopy for up to 29°

Black 6-speed RF remote
control with reverse




ACCESSORIES

Decora-style,
3-speed,
non-dimmable
wall control



60° cathedral ceiling canopy

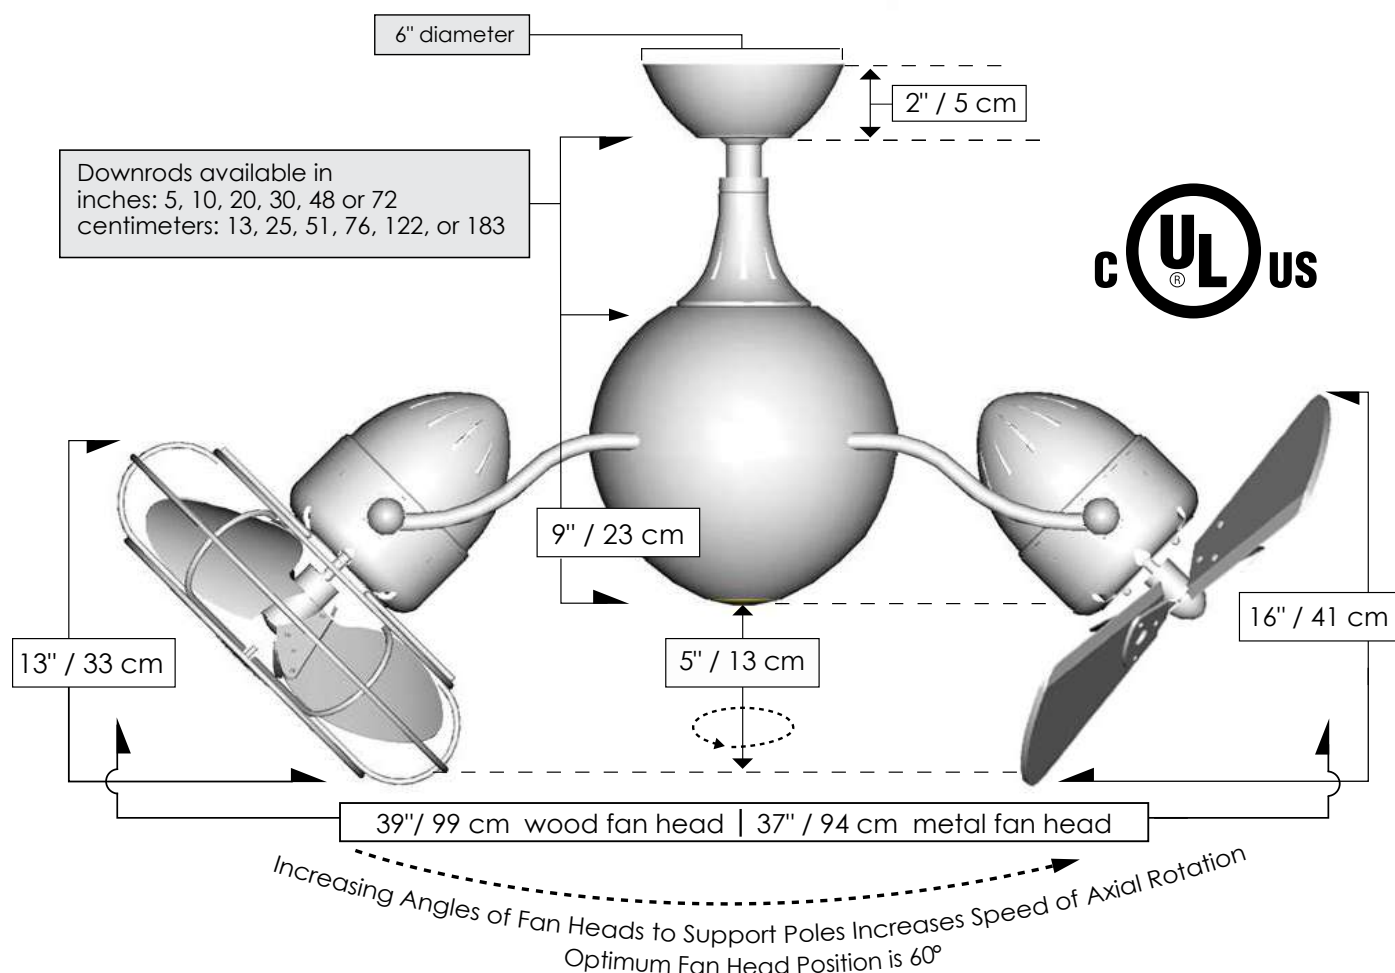

CEILING PITCH TABLE

0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

CEILING HEIGHT / DOWNROD TABLE

Ceiling Height	Downrod Lengths <i>Field cuttable. Non-threaded</i>
10 ft or less	5 inches / 13 cm <i>Use safety cages if applicable</i>
10 - 12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm
15 feet	48 inches / 122 cm
16 feet +	72 inches / 183 cm

Matthews Fan Company

1881 Industrial Drive
Libertyville, IL 60048

Tele: 847.680.9043

Fax: 847.680.8140

www.matthewsfanco.com

© 2023 Matthews Fan Company. All rights reserved.



shown in Matte White
with 56" Gray Ash blades



Alessandra

Minimal form with maximum efficiency. With a wide range of blade sizes, the Alessandra can accommodate any space. This thoughtfully crafted and versatile fan will complement any aesthetic and improves the health and comfort of any room. Highly customizable, the Alessandra is available in five different body finishes, seven blade options, and even an option with a CCT light kit as the Alessandra-LK. Suitable for wet locations. Backed by a limited lifetime warranty, our fans are of the highest quality and will dutifully perform for years to come. Constructed of cast aluminum and heavy stamped steel, the Alessandra has a limited lifetime warranty.

Product Features



DC
Motor



Wet
Location



Silent



Remote
Control



Optional
Wall Control



30° Slant
Ceiling Canopy



60° Cathedral
Ceiling Canopy



Unipack
Shipping*



shown in Matte Black
with 72" Matte Black blades

shown in Brushed
Nickel with 42"
Brushed Nickel blades

shown in Matte Black
with 56" Barn Wood blades

shown in
Matte White with
42" Walnut blades

shown in Brushed Brass
with 56" Barn Wood blades

shown in
Textured Bronze
with 42" Walnut blades

ALESSANDRA

FINISH AND BLADE OPTIONS

SKU#	AK-XXXX-XXX-XX (Model+Finish+Blade+Diameter)	
Standard Finishes	Brushed Brass	BRBR
	Brushed Nickel	BN
	Matte Black	BK
	Matte White	MWH
	Textured Bronze	TB
Blade Finishes	Barn Wood	BW
	Brushed Nickel	BN
	Matte Black	BK
	Matte White	MWH
	Gray Ash	GA
	Walnut	WN
Fan Diameter	42 inches / 107 cm	42
	56 inches / 142 cm	56
	72 inches / 183 cm	72

TECHNICAL SPECS

Fan Diameter	inches: 42, 56 or 72 centimeters: 107, 142 or 183
Blade Material	ABS
Overall Drop	8 inches / 20 cm + downrod length
Fan Weight	17 lbs
Downrods Lengths <i>Field cuttable. Non-threaded</i>	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Voltage	110 or 220
Motor Type	DC
Environment	Wet location. All weather blade system. Neither outdoor coastal, saltwater nor chlorine compatible.
Ambience	Silent
Safety Certification	UL / CUL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Diameter	42 inch / 107 cm	56 inch / 142 cm	72 inch / 183 cm
RPM (Low / High)	50 / 192	50 / 138	50 / 107
CFM (Low / High)	1349 / 5741	2436 / 7259	4208 / 8869
Watts (High)	35.97	34.79	34.37
CFM/Watt (High)	168	232	307
Blade Pitch	13°	13°	13°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Slant ceiling canopy for up to 30°

Black 6-speed RF
remote control
with reverse




ACCESSORIES

White wireless
Decora-style,
6-speed,
wall control




60° cathedral ceiling canopy

* Unipack is not available for 72" blade option

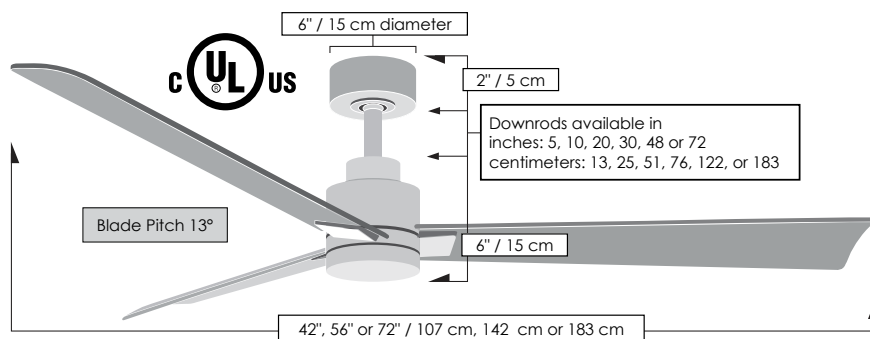

Blade Options

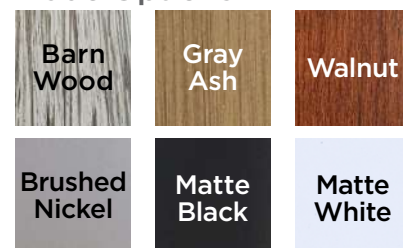

shown in Brushed Brass
with 72" Matte White blades



Alessandra-LK

Minimal form with maximum efficiency. With a wide range of blade sizes, the Alessandra-LK can accommodate any space. This thoughtfully crafted and versatile fan will complement any aesthetic and improves the health and comfort of any room. Highly customizable, the Alessandra-LK is available in five different body finishes, seven blade options, and a dimmable 2700K-6500K CCT light kit. Suitable for damp locations. Backed by a limited lifetime warranty, our fans are of the highest quality and will dutifully perform for years to come. Constructed of cast aluminum and heavy stamped steel, the Alessandra-LK has a limited lifetime warranty.

Product Features



DC
Motor



Damp
Location



Silent



LED
Lamp



Dimmable
Lamp



Remote
Control



Optional
Wall Control



30° Slant
Ceiling Canopy



60° Cathedral
Ceiling Canopy





Unpack
Shipping*





Blade Options

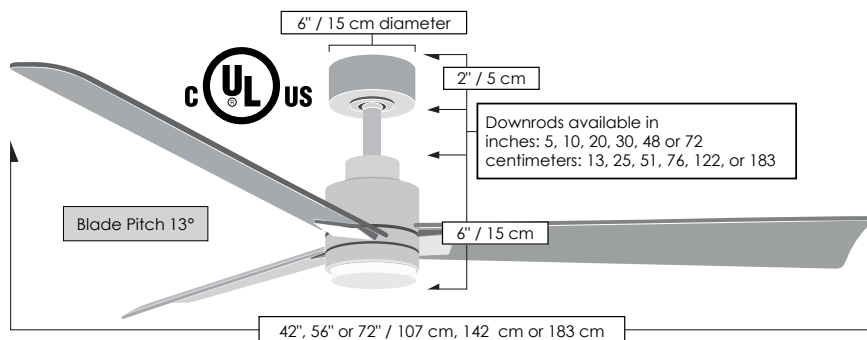

ALESSANDRA-LK

FINISH AND BLADE OPTIONS

SKU#	AKLK-XXXX-XXX-XX (Model+Finish+Blade+Diameter)	
Standard Finishes	Brushed Brass Brushed Nickel Matte Black Matte White Textured Bronze	BRBR BN BK MWH TB
Blade Finishes	Barn Wood Brushed Nickel Matte Black Matte White Gray Ash Walnut	BW BN BK MWH GA WN
Fan Diameter	42 inches / 107 cm 56 inches / 132 cm 72 inches / 152 cm	42 56 72

TECHNICAL SPECS

Fan Diameter	inches: 42, 56 or 72 centimeters: 107, 142 or 183
Blade Material	ABS
Overall Drop	8 inches / 20 cm + downrod length*
Fan Weight	17 lbs
Downrods Lengths <i>Field cuttable. Non-threaded</i>	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Voltage	110 or 220
Motor Type	DC
Environment	Wet location. All weather blade system. Neither outdoor coastal, saltwater nor chlorine compatible.
Ambience	Silent
Safety Certification	UL / CUL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Diameter	42 inch / 107 cm	56 inch / 142 cm	72 inch / 183 cm
RPM (Low / High)	50 / 192	50 / 138	50 / 107
CFM (Low / High)	1349 / 5741	2436 / 7259	4208 / 8869
Watts (High)	35.97	34.79	34.37
CFM/Watt (High)	168	232	307
Blade Pitch*	13°	13°	13°

LIGHT KIT PHOTOMETRICS

Lamping (Replaceable)	Integrated LED
Remote Dimmable	Yes
Delivered Temperature in K	Variable
CRI	90
Watts	22
Hours	30,000

Delivered Lumens

2700K	3000K	4000K	5000K	6500K
1063	1088	1234	1221	1107

Light kit longevity if used 6 Hours/Day: 13.7 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Slant ceiling canopy for up to 30°

ACCESSORIES

Black 6-speed RF remote control with reverse



White wireless Decora-style, 6-speed, wall control




60° cathedral ceiling canopy

* Unipack is not available for 72" blade options

Shown in Matte White
with Light Maple Blades




Alessandra TROPICAL

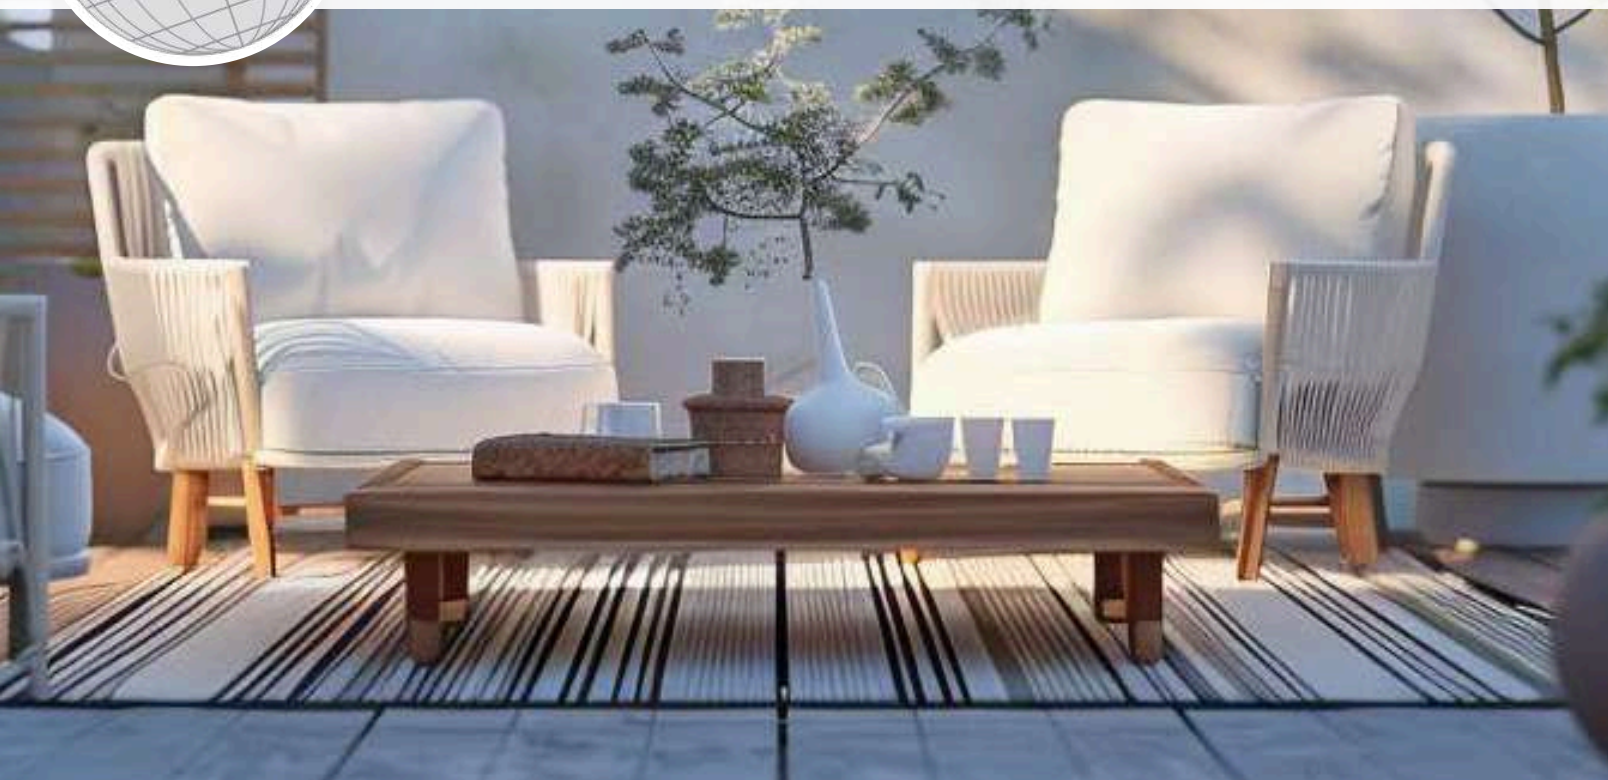

A classic palm leaf form with a twist. With a wide range of blade finishes, including an exciting assortment of pastel finishes, the Alessandra Tropical can accommodate any space. This thoughtfully crafted and versatile fan will complement any aesthetic and improve the health and comfort of any room. Highly customizable, the Alessandra Tropical is available in five different body finishes, ten (10) blade options, and even an option with a CCT light kit. This fan is suitable for wet locations. Backed by a limited lifetime warranty, our fans are of the highest quality and will dutifully perform for years to come. Constructed of cast aluminum and heavy stamped steel, the Alessandra Tropical has a limited lifetime warranty.

Product Features





Blade Options



Alessandra TROPICAL

FINISH AND BLADE OPTIONS

SKU#	AKTP-XXXX-XXX (Model+Finish+Blade)	
Standard Finishes	Brushed Brass	BRBR
	Brushed Nickel	BN
	Matte Black	BK
	Matte White	MWH
	Textured Bronze	TB
Blade Finishes	Barn Wood Tone	BW
	Gray Ash Tone	GA
	Light Maple Tone	LM
	Matte Black	BK
	Matte White	MWH
	Walnut Tone	WN
	Light Blue	BL
	Light Pink	PI
	Light Yellow	YE
	Lilac	LI
Fan Diameter	48 inches / 121.92 cm 48	

TECHNICAL SPECS

Fan Diameter	48 inches / 121.92 cm 48
Blade Material	ABS
Overall Drop	8 inches / 20 cm + downrod length
Fan Weight	18 lbs
Downrods Lengths Field cuttable Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Voltage	110
Motor Type	DC
Environment	Wet location. All weather blade system. Neither outdoor coastal, saltwater nor chlorine compatible
Ambience	Silent
Safety Certification	UL / CUL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Diameter	48 inch / 121.92cm
RPM (Low / High)	50 / 170
CFM (Low / High)	1393.5 / 4536.5
Watts (High)	34.98
CFM/Watt (High)	143
Blade Pitch	16°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm
Slant ceiling canopy for up to 30°

ACCESSORIES

Black 6-speed RF
remote control
with reverse




Decora-style,
3-speed,
non-dimmable
wall control



60° cathedral ceiling canopy
mounting system

Alessandra TROPICAL

TECHNICAL SPECIFICATIONS

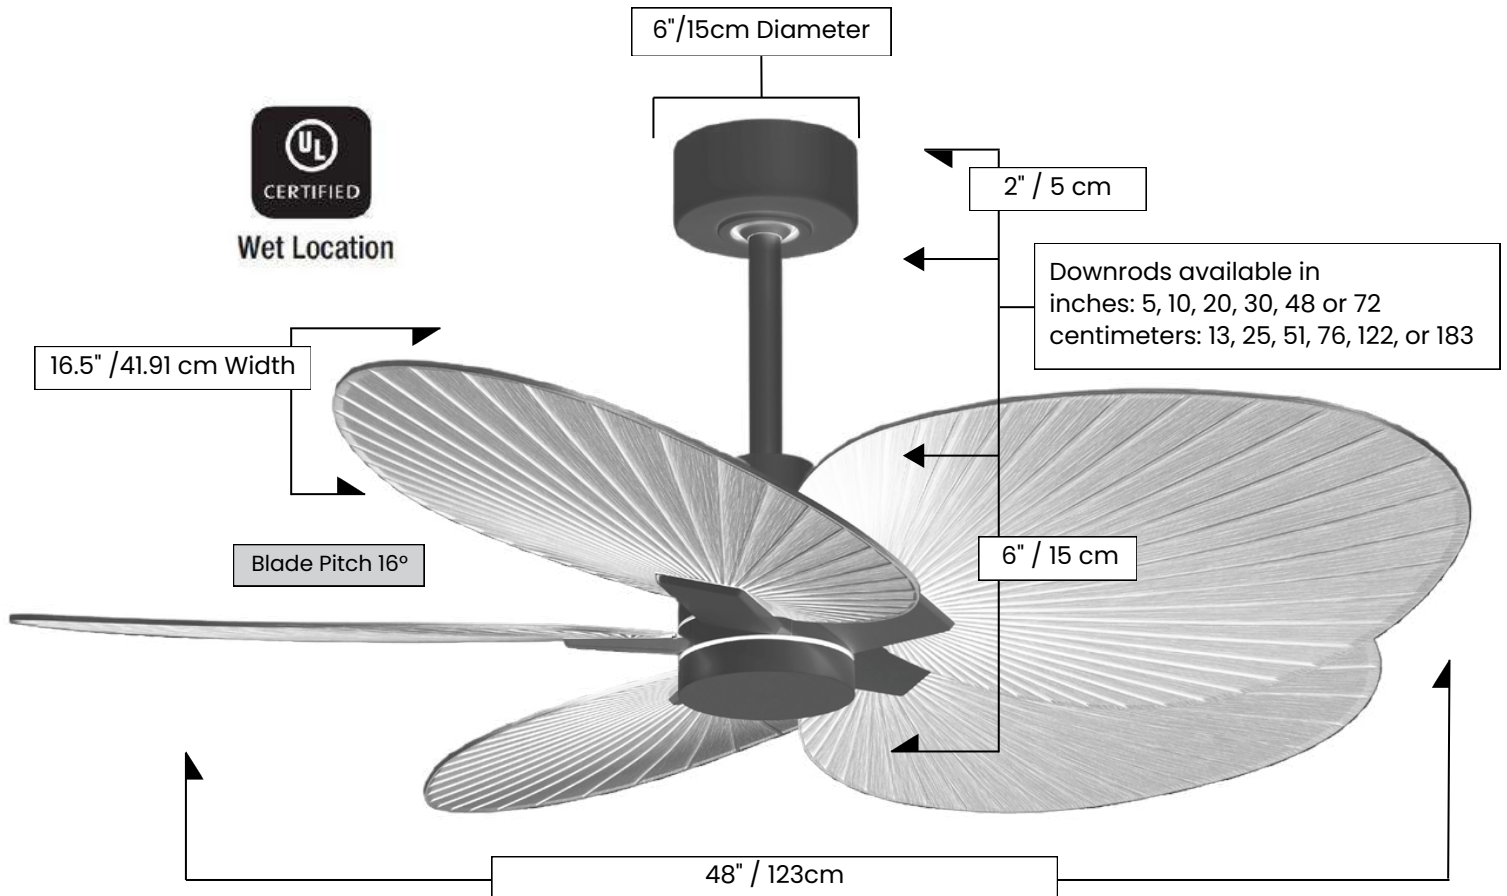

CEILING PITCH TABLE

0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

CEILING HEIGHT / DOWNROD TABLE

Ceiling Height	Downrod Lengths <i>Field cuttable. Non-threaded</i>
10 ft or less	5 inches / 13 cm <i>Use safety cages if applicable</i>
10 -12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm
15 feet	48 inches / 122 cm
16 feet +	72 inches / 183 cm

Matthews Fan Company

1881 Industrial Drive

Libertyville, IL 60048

Tele: 847.680.9043

Fax: 847.680.8140

www.matthewsfanco.com

© 2023 Matthews Fan Company. All rights reserved.





Shown in Textured Bronze
with Walnut Blades





Alessandra TROPICAL - LK



A classic palm leaf form with a twist. With a wide range of blade finishes, including an exciting assortment of pastel finishes, the Alessandra Tropical can accommodate any space. This thoughtfully crafted and versatile fan will complement any aesthetic and improve the health and comfort of any room. Highly customizable, the Alessandra Tropical is available in five different body finishes, ten (10) blade options, and even an option with a CCT light kit. This fan is suitable for wet locations. Backed by a limited lifetime warranty, our fans are of the highest quality and will dutifully perform for years to come. Constructed of cast aluminum and heavy stamped steel, the Alessandra Tropical has a limited lifetime warranty.

Product Features



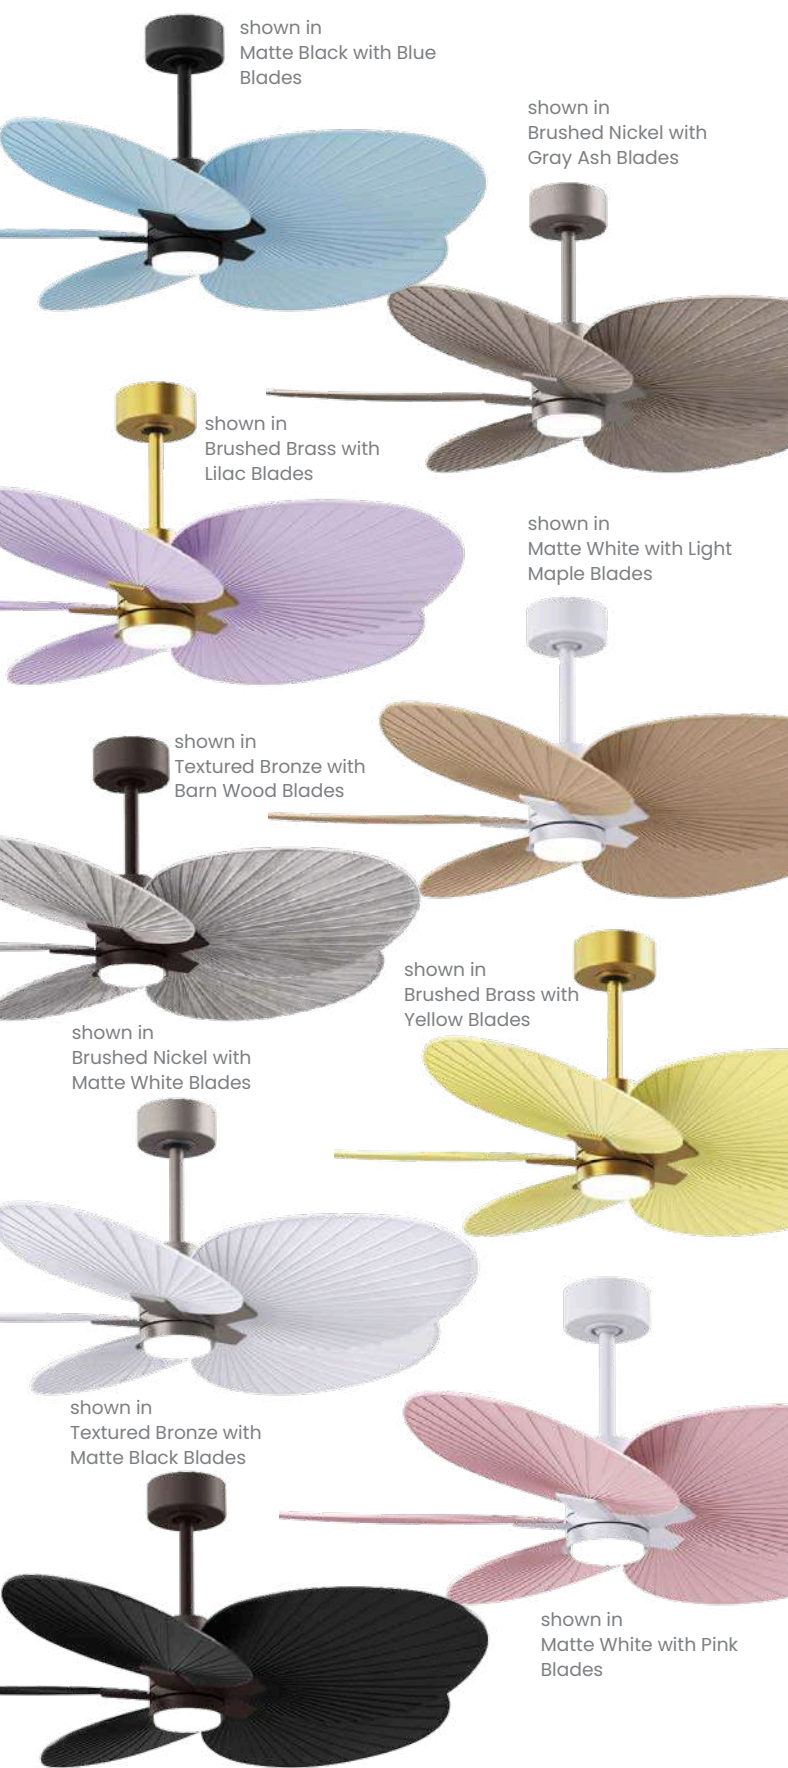

Blade Options



Alessandra TROPICAL - LK

FINISH AND BLADE OPTIONS

SKU#	AKTPLK-XXXX-XXX (Model+Finish+Blade)	
Standard Finishes	Brushed Brass Brushed Nickel Matte Black Matte White Textured Bronze	BRBR BN BK MWH TB
Blade Finishes	Barn Wood Tone Gray Ash Tone Light Maple Tone Matte Black Matte White Walnut Tone Light Blue Light Pink Light Yellow Lilac	BW GA LM BK MWH WN BL PI YE LI
Fan Diameter	48 inches / 121.92 cm 48	

TECHNICAL SPECS

Fan Diameter	48 inches / 121.92 cm 48
Blade Material	ABS
Overall Drop	8 inches / 20 cm + downrod length
Fan Weight	18 lbs
Downrods Lengths Field cuttable Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Voltage	110
Motor Type	DC
Environment	Wet location. All weather blade system. Neither outdoor coastal, saltwater nor chlorine compatible
Ambience	Silent
Safety Certification	UL / CUL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Diameter	48 inches / 121.92 cm
RPM (Low / High)	50 / 170
CFM (Low / High)	1393.5 / 4536.5
Watts (High)	34.98
CFM/Watt (High)	143
Blade Pitch	16°

LIGHT KIT PHOTOMETRICS

Lamping (Replaceable)	Integrated LED
Remote Dimmable	YES
Delivered Temperature in K	5CCT (*see Delivered Lumens)
CRI	90
Watts	22
Hours	30,000

*Delivered Lumens

2700K	3000K	4000K	5000K	6500K
1063	1088	1234	1221	1107

Light Kit longevity if used 6 Hours/Day 13.7 years

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 30°

Black 6-speed RF
remote control
with reverse



ACCESSORIES


Decora-style,
3-speed,
non-dimmable
wall control



60° cathedral ceiling canopy
mounting system

Alessandra TROPICAL - LK

TECHNICAL SPECIFICATIONS

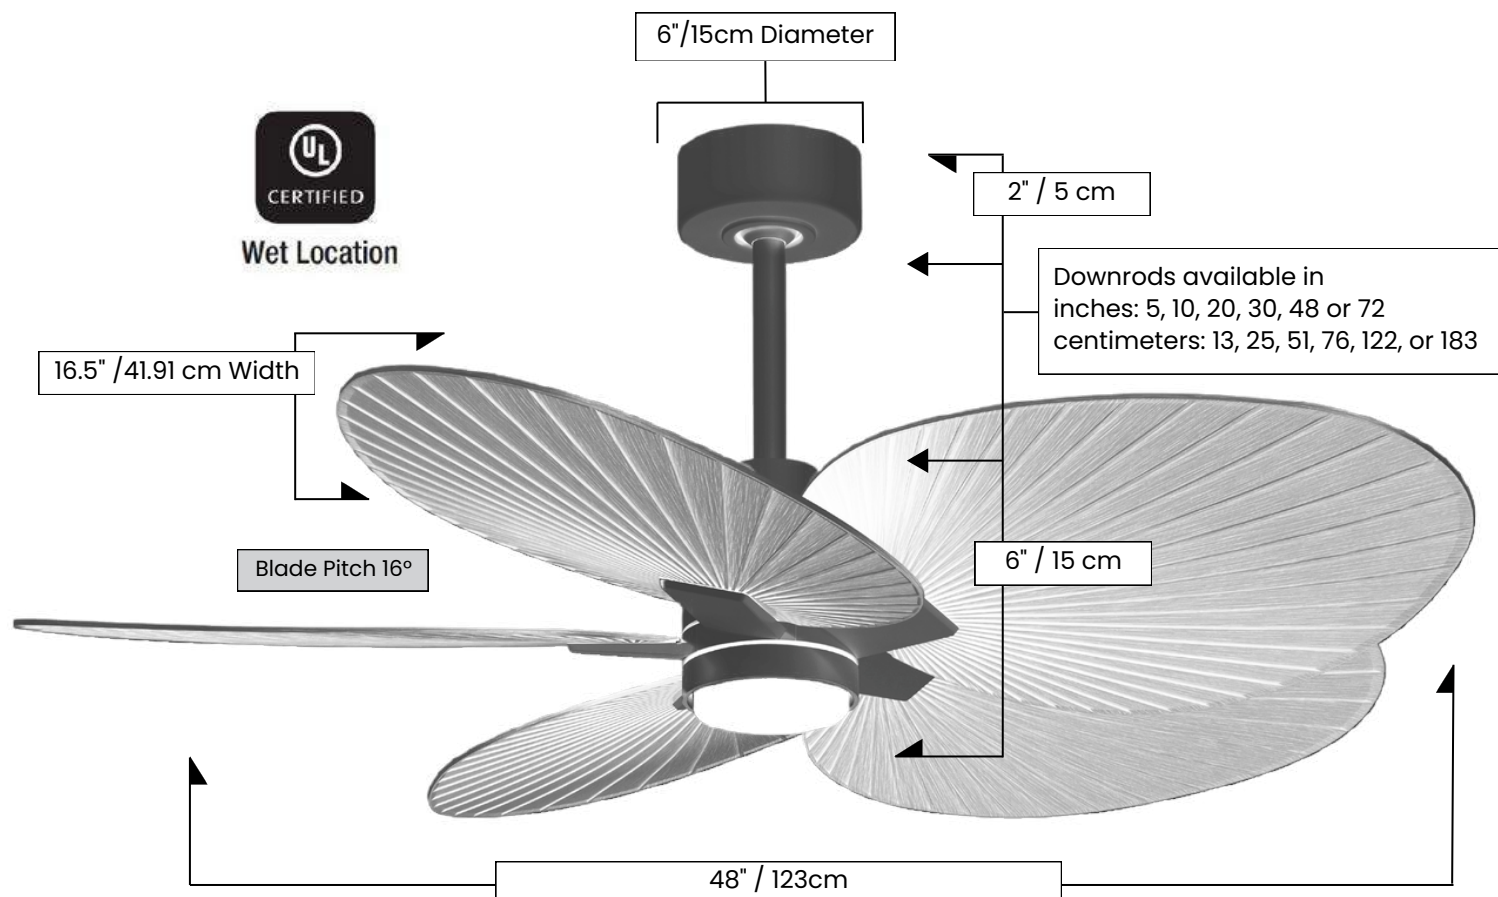

CEILING PITCH TABLE	
0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

CEILING HEIGHT / DOWNROD TABLE	
Ceiling Height	Downrod Lengths <i>Field cuttable. Non-threaded</i>
10 ft or less	5 inches / 13 cm <i>Use safety cages if applicable</i>
10 -12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm
15 feet	48 inches / 122 cm
16 feet +	72 inches / 183 cm

Matthews Fan Company

1881 Industrial Drive

Libertyville, IL 60048

Tele: 847.680.9043

Fax: 847.680.8140

www.matthewsfanco.com

© 2023 Matthews Fan Company. All rights reserved.



Shown in Matte White with
Light Maple Tone Blades



Ariella




Elevate your space with the Ariella ceiling fan, a sleek, contemporary centerpiece boasting an eight-blade design and optional light kit for superior airflow and sophistication. Engineered for diverse environments, including wet locations, it offers five-body and seven-blade finishes to complement any decor in any setting. The perfect medley of options gives you the choice and range from the sleek, modern look or warm rustic style to be the perfect finishing touch to your indoor and outdoor designs.

Product Features





Blade Options

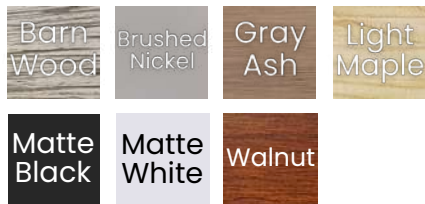

Ariella

FINISH AND BLADE OPTIONS

SKU#	AN-XXXX-XXX-64 (Model+Finish+Blade+Blade Size)	
Standard Finishes	Brushed Brass	BRBR
	Brushed Nickel	BN
	Matte Black	BK
	Matte White	MWH
	Textured Bronze	TB
Blade Finishes	Barn Wood Tone	BW
	Brushed Nickel	BN
	Gray Ash Tone	GA
	Light Maple Tone	LM
	Matte Black	BK
	Matte White	MWH
	Walnut Tone	WN
Fan Diameter	64 inches / 162.56 cm	64

TECHNICAL SPECS

Fan Diameter	64 inches / 162.56 cm	64
Blade Material	ABS	
Overall Drop	8 inches / 20.32 cm + downrod length	
Fan Weight	28 lbs	
Downrods Lengths Field cuttable Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	1 inch	
Voltage	110	
Motor Type	DC	
Environment	Wet location. All weather blade system. Neither outdoor coastal, saltwater nor chlorine compatible	
Ambience	Silent	
Safety Certification	UL / CUL	
Warranty	Limited Lifetime	

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Diameter	64 inches / 162.56 cm
RPM (Low / High)	50 / 105
CFM (Low / High)	3343 / 6862.5
Watts (High)	33.11
CFM/Watt (High)	246
Blade Pitch	18°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm
Slant ceiling canopy for up to 30°

ACCESSORIES

Black 6-speed RF remote control with reverse




Decora-style, 3-speed, non-dimmable wall control



60° cathedral ceiling canopy mounting system

Ariella

TECHNICAL SPECIFICATIONS

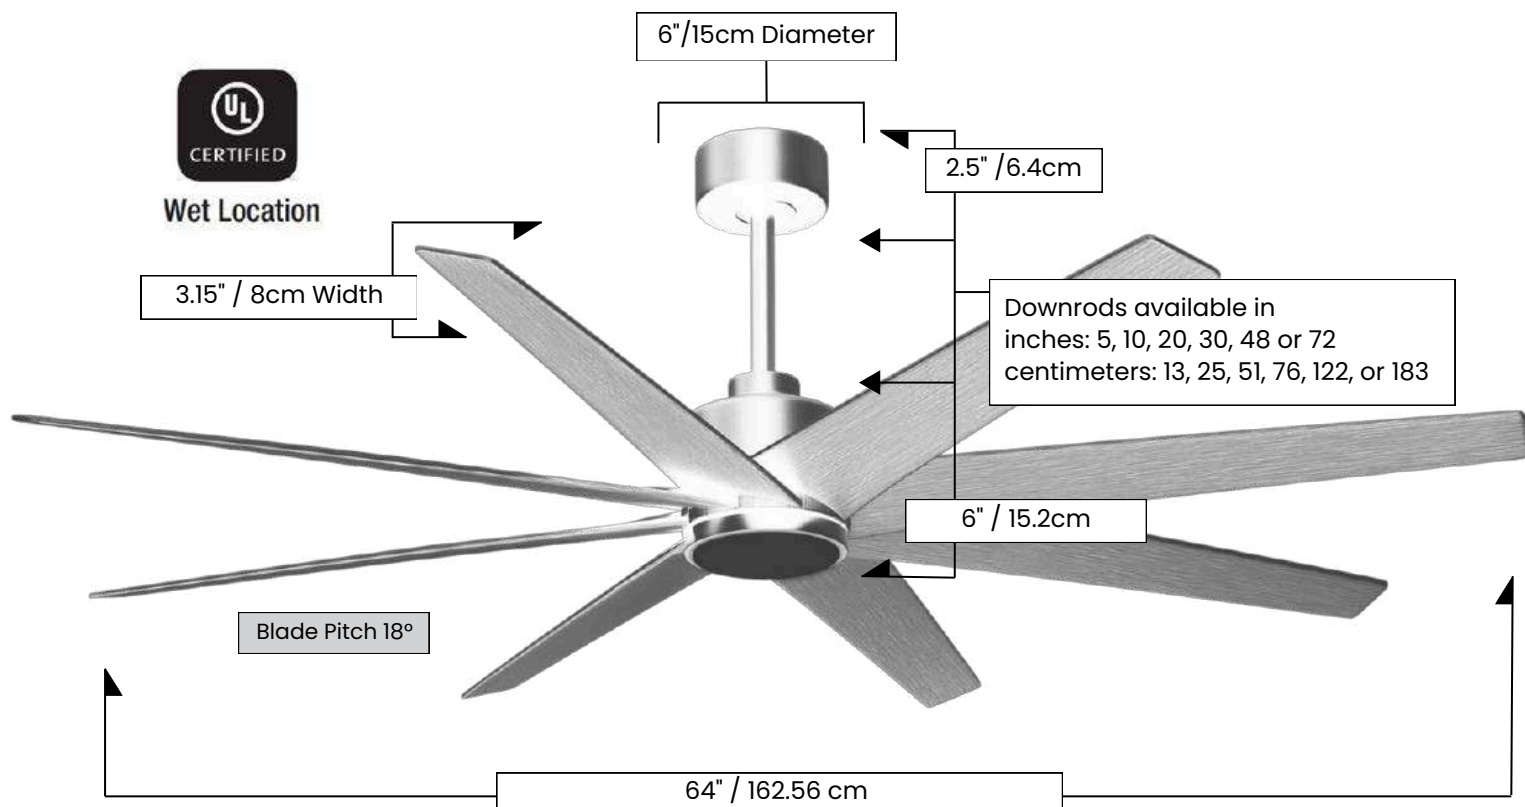

CEILING PITCH TABLE

0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

CEILING HEIGHT / DOWNROD TABLE

Ceiling Height	Downrod Lengths <i>Field cuttable. Non-threaded</i>
10 ft or less	5 inches / 13 cm <i>Use safety cages if applicable</i>
10 -12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm
15 feet	48 inches / 122 cm
16 feet +	72 inches / 183 cm

Matthews Fan Company

1881 Industrial Drive

Libertyville, IL 60048

Tele: 847.680.9043

Fax: 847.680.8140

www.matthewsfanco.com

© 2023 Matthews Fan Company. All rights reserved.



Shown in Matte
Black with Walnut
Tone Blades




Ariella - LK



Elevate your space with the Ariella ceiling fan, a sleek, contemporary centerpiece boasting an eight-blade design and optional light kit for superior airflow and sophistication. Engineered for diverse environments, including wet locations, it offers five-body and seven-blade finishes to complement any decor in any setting. The perfect medley of options gives you the choice and range from the sleek, modern look or warm rustic style to be the perfect finishing touch to your indoor and outdoor designs.

Product Features





shown in Matte Black
with Barn Wood Tone Blades

shown in
Brushed Brass with
Matte Black Blades

shown in Matte Black
with Gray Ash Blades


shown in Matte
White with Brushed
Nickel Blades

shown in
Textured Bronze with
Matte White Blades

shown in
Brushed Nickel with
Light Maple Blades

shown in
Brushed Brass with
Walnut Blades

Blade Options

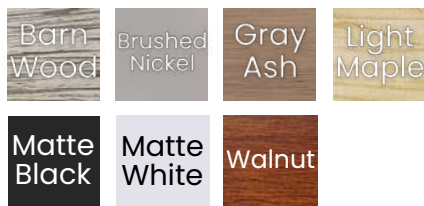

Ariella - LK

FINISH AND BLADE OPTIONS

SKU#	ANLK-XXXX-XXX-64 (Model+Finish+Blade+Blade Size)	
Standard Finishes	Brushed Brass Brushed Nickel Matte Black Matte White Textured Bronze	BRBR BN BK MWH TB
Blade Finishes	Barn Wood Tone Brushed Nickel Gray Ash Tone Light Maple Tone Matte Black Matte White Walnut Tone	BW BN GA LM BK MWH WN
Fan Diameter	64 inches / 162.56 cm	64

TECHNICAL SPECS

Fan Diameter	64 inches / 162.56 cm	64
Blade Material	ABS	
Overall Drop	9 inches / 23 cm + downrod length	
Fan Weight	28 lbs	
Downrods Lengths Field cuttable Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	1 inch	
Voltage	110	
Motor Type	DC	
Environment	Wet location. All weather blade system. Neither outdoor coastal, saltwater nor chlorine compatible	
Ambience	Silent	
Safety Certification	UL / CUL	
Warranty	Limited Lifetime	

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Diameter	64 inches / 162.56 cm
RPM (Low / High)	50 / 105
CFM (Low / High)	3343 / 6862.5
Watts (High)	33.11
CFM/Watt (High)	246
Blade Pitch	18°

LIGHT KIT PHOTOMETRICS

Lamping (Replaceable)	Integrated LED
Remote Dimmable	YES
Delivered Temperature in K	5CCT (*see Delivered Lumens)
CRI	90
Watts	22
Hours	30,000

*Delivered Lumens

2700K	3000K	4000K	5000K	6500K
1063	1088	1234	1221	1107

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm
Vaulted ceiling canopy for up to 30°

Black 6-speed RF
remote control with
reverse



ACCESSORIES


Decora-style,
3-speed,
non-dimmable
wall control



60° cathedral ceiling canopy
mounting system

Ariella - LK

TECHNICAL SPECIFICATIONS

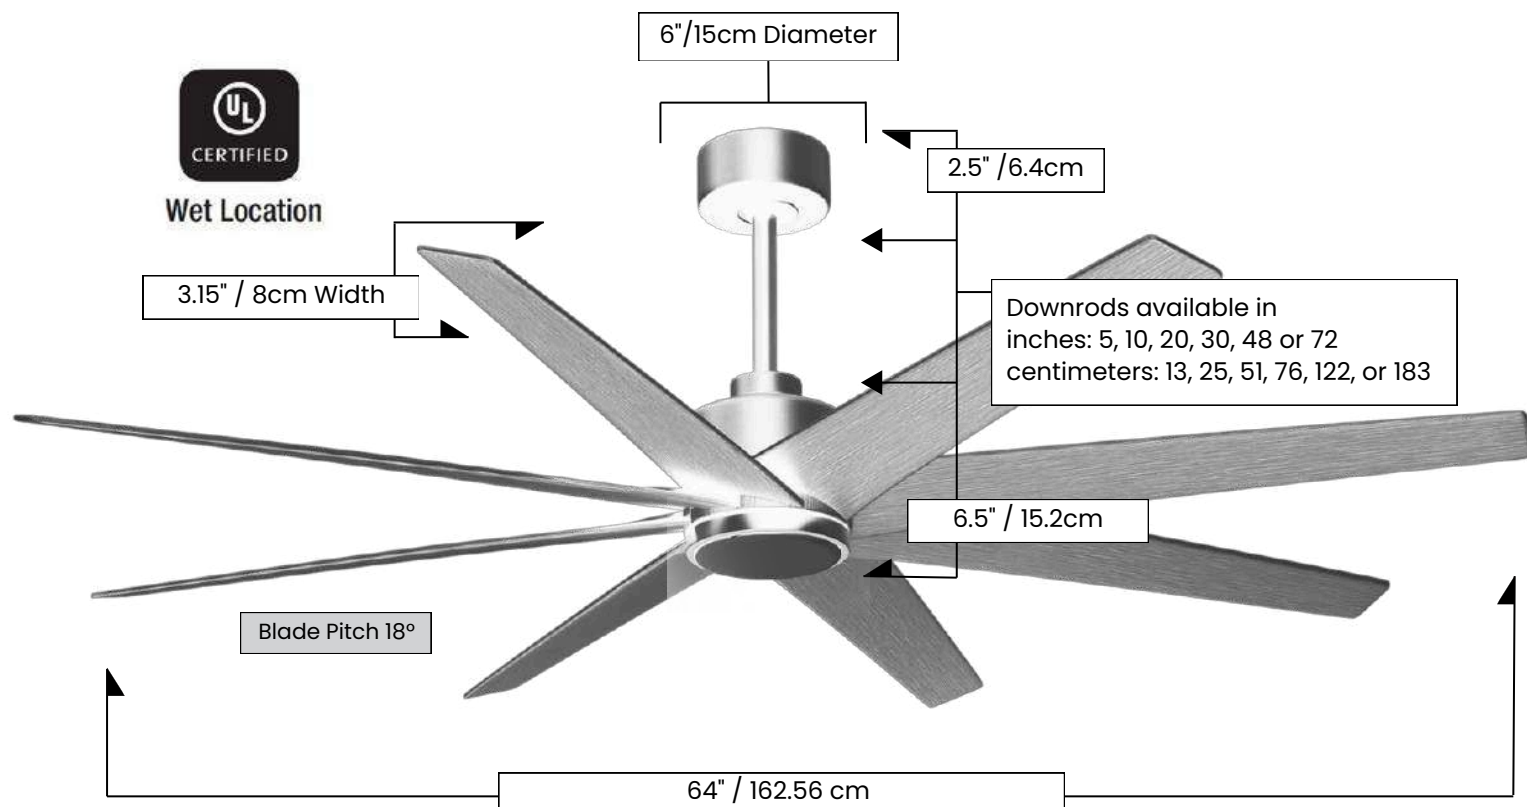

CEILING PITCH TABLE	
0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

CEILING HEIGHT / DOWNROD TABLE	
Ceiling Height	Downrod Lengths <i>Field cuttable. Non-threaded</i>
10 ft or less	5 inches / 13 cm <i>Use safety cages if applicable</i>
10 -12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm
15 feet	48 inches / 122 cm
16 feet +	72 inches / 183 cm

Matthews Fan Company

1881 Industrial Drive

Libertyville, IL 60048

Tele: 847.680.9043

Fax: 847.680.8140

www.matthewsfanco.com

© 2023 Matthews Fan Company. All rights reserved.



shown in Textured Bronze with
Metal Blades and Decorative Cage



Dagny



The double-headed 360° rotational fan, Dagny, with cylindrical central housing and straight, parallel arms, is designed in the retrospective aesthetic. The Dagny offers smooth and quiet axial rotation. Its fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews rotational fans circulate heat and air-conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum and heavy stamped steel, the Dagny carries a limited lifetime warranty. The Dagny is also available with a light kit as the **Dagny-LK**.

Product Features



American
Labor



AC
Motor



360°
Rotation



Safety Cage
Compatible



Damp
Location



Soothing
White Noise



Remote
Control



29° Slant
Ceiling Canopy



60° Cathedral
Ceiling Canopy




Unipack
Shipping

shown in Textured Bronze
with Barn Wood Blades

shown in Textured Bronze
with Matte Black Blades

shown in Matte Black
with Mahogany Blades

shown in Textured Bronze
with Metal Blades in
Safety Cage

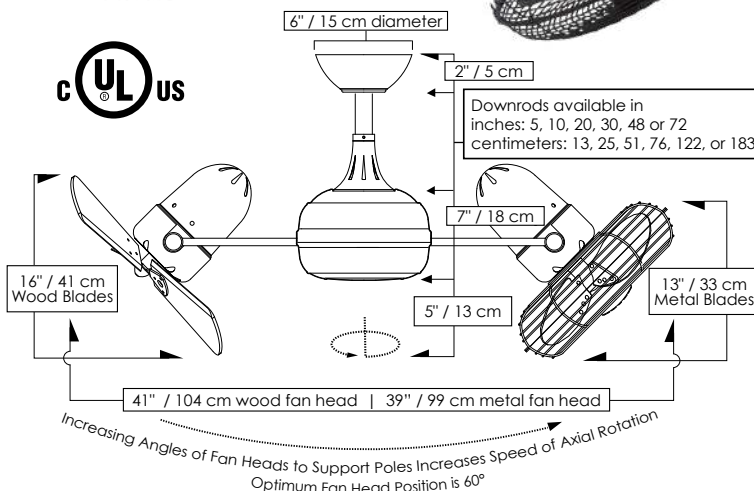

DAGNY

FINISH AND BLADE OPTIONS

SKU#	DG-XX-XXXX (Model+Finish+Blade)	
Standard Finish	Textured Bronze Matte Black	TB BK
Blade Styles and Material	Solid Wood / Barn Wood Solid Wood / Mahogany Solid Wood / Matte Black Metal w/ Decorative Cage Metal w/ Safety Cage	WDBW WD WDBK MTL MSAF

TECHNICAL SPECS

Fan Weight	22 lbs
Voltage	110 (Contact us for 220 conversion)
Motor Type	AC
Rotation	Yes
Downrods Lengths <i>Field cuttable, Non-Threaded</i>	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Overall Drop	14 inches / 36 cm + downrod length
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.
Ambience	Soothing White Noise
Safety Certification	UL / CUL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Head Options	Solid Wood	Metal with Guard
Fan Diameter	41 inches / 104 cm	39 inches / 99 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Safety Cage or Decorative Cage
RPM (Low / High)	1012 / 1445	1035 / 1448
CFM (Low / High)	2565 / 4168	2199 / 3169
Watts (High)	87.26	80.69
CFM/Watt (High)	50	42
Blade Pitch	19°	31°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Slant ceiling canopy for up to 29°

Black 3-speed RF remote
control with reverse



ACCESSORIES

Decora-style,
3-speed,
non-dimmable
wall control




60° cathedral ceiling canopy



shown in Brushed Nickel
with Mahogany blades



Dagny LK

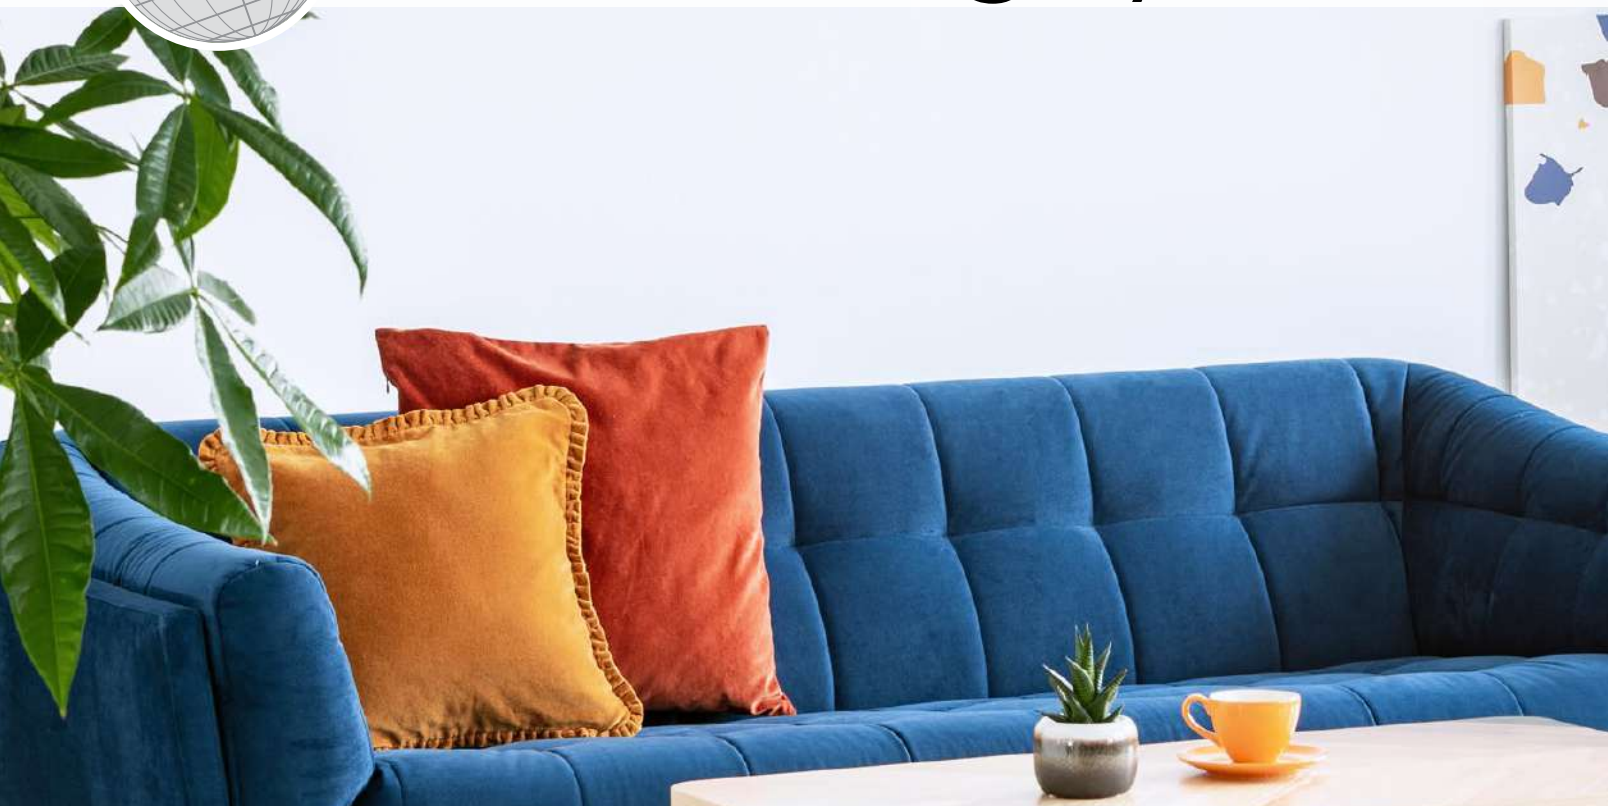

With clean, fluid lines, the Dagny LK 360° rotational fan is a striking centerpiece in any space. Its movement about its cylindrical center housing is smooth and quiet. Dagny LK's dual fan heads can be infinitely positioned in 180-degree arcs for optimum and customized air movement. As the angle between the fan heads and the horizontal support rods is increased, so does the speed of Dagny LK's axial rotation. Matthews rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed from cast aluminum and heavy stamped steel, the Dagny LK carries a limited lifetime warranty. This model is also available without a light kit as the **Dagny**.

Product Features



DAGNY LK

FINISH AND BLADE OPTIONS

SKU#	DGLK-XX-XXXX (Model+Finish+Blade)	
Standard Finishes	Brushed Nickel	BN
	Matte Black	BK
Blade Styles and Material	Textured Bronze	TB
	Solid Wood / Barn Wood	WDBW
	Solid Wood / Mahogany	WD
	Solid Wood / Matte Black	WDBK
	Metal w/ Decorative Cage	MTL
	Metal w/ Safety Cage	MSAF

TECHNICAL SPECS

Overall Drop	14 inches / 41 cm + downrod length
Fan Weight	22 lbs
Voltage	110 (Contact us for 220 conversion)
Motor Type	AC
Rotation	Yes
Downrods Lengths <i>Field cuttable, Non-Threaded</i>	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.
Ambience	Soothing White Noise
Safety Certification	UL / CUL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Head Options	Solid Wood	Metal with Guard
Fan Diameter	41 inches / 104 cm	39 inches / 99 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Safety Cage or Decorative Cage
RPM (Low / High)	757 / 1256	1069 / 1442
CFM (Low / High)	2557 / 4171	1844 / 3067
Watts (High)	87.36	80.50
CFM/Watt (High)	50	39
Blade Pitch	19°	31°

LIGHT KIT PHOTOMETRICS

Lamping (Replaceable)	Integrated LED
Remote Dimmable	Yes
Delivered Temperature in K	2969
Delivered Lumens	523.7
CRI	90
Watts	18
Hours	50,000

Light kit longevity if used 6 Hours/Day: 22.8 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 29°

Black 3-speed RF remote control with reverse

ACCESSORIES

Decora-style, 3-speed, non-dimmable wall control


60° cathedral ceiling canopy

shown in Brushed Nickel
with Barn Wood Blades

shown in Textured Bronze
with Metal Blades and
Decorative Cage

shown in Textured Bronze
with Barn Wood Blades

shown in Matte Black
with Matte Black Blades

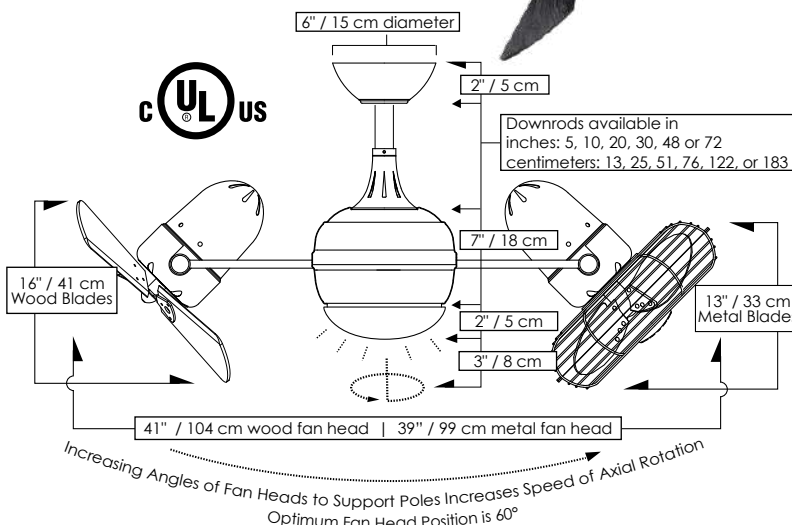

shown in Brushed Nickel with
Metal blades and Decorative Cage



Diane

The Diane directional fan head provides maximum airflow with a sweeping 90° forward and reverse oscillation. The Diane can be hung in small, awkward spaces or in front of HVAC ducts to improve the efficiency of heating, ventilation or air conditioning of any space. Constructed of cast aluminum and heavy stamped steel, the Diane carries a limited lifetime warranty.

Product Features



shown in
Textured Bronze
with Mahogany blades



shown in Textured
Bronze with
Metal blades and
Decorative Cage




shown in
Matte Black with
Matte Black blades



shown in Polished Chrome
with Metal blades and
Decorative Cage



shown in
Polished Chrome
with Barn Wood blades

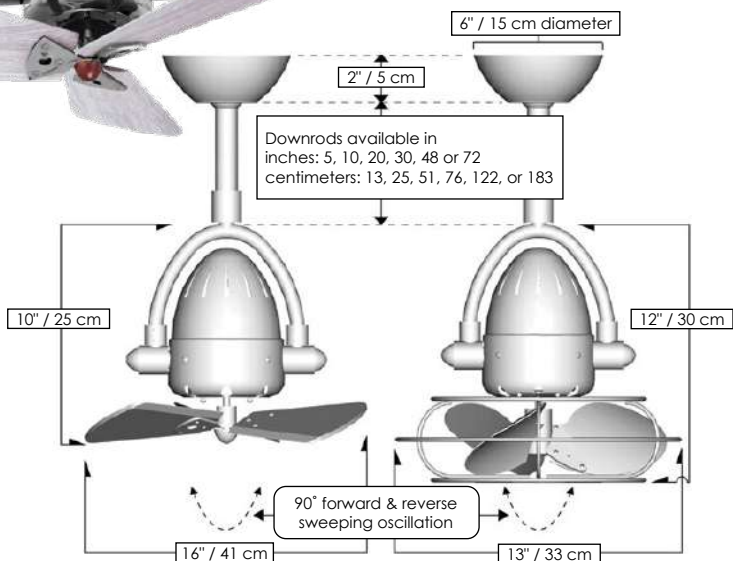

DIANE

FINISH AND BLADE OPTIONS

SKU#	DI-XX-XXXX (Model+Finish+Blade)	
Standard Finishes	Brushed Nickel	BN
	Matte Black	BK
	Polished Chrome	CR
	Textured Bronze	TB
Blade Styles and Material	Solid Wood/Barn Wood	WDBW
	Solid Wood/Mahogany	WD
	Solid Wood/Matte Black	WDBK
	Metal w/ Decorative Cage	MTL
	Metal w/ Safety Cage	MSAF

TECHNICAL SPECS

Fan Weight		12 lbs
Voltage		110 or 220
Motor Type		AC
Oscillation		Yes
Downrods Lengths <i>Field cuttable. Non-threaded</i>		inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter		1 inch
Overall Drop	Metal Blades	14 inches / 36 cm + downrod length
	Wood Blades	12 inches / 30 cm + downrod length
Environment		Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.
Ambience		Soothing White Noise
Safety Certification		ETL / CETL
Warranty		Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Head Options	Solid Wood	Metal with Guard
Fan Diameter	16 inches / 41 cm	13 inches / 33 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage
RPM (Low / High)	865 / 1325	900 / 1377
CFM (Low / High)	1441 / 2152	1068 / 1345
Watts (High)	51.37	46.14
CFM/Watt (High)	44	31
Blade Pitch	19°	31°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm
Vaulted ceiling canopy for up to 29°

ACCESSORIES

Black 3-speed
RF remote
control



Decora-style,
3-speed wall
control in
white



60° cathedral ceiling canopy

shown in Gloss White
with Barn Wood blades

COASTAL WET LOCATION 
100% 316 MARINE GRADE STAINLESS STEEL



Donaire

With teardrop motor housing, the 52" Donaire 316 marine grade stainless steel coastal wet location ceiling fan is transitional in design. Donaire is finished in brushed bronze, brushed stainless, or gloss white, equipped with all weather blades and 16W LED dimmable light kit with optional metal cover. Constructed of entirely 316 marine grade stainless steel, the Donaire carries a limited lifetime warranty.

Product Features



AC
Motor



Coastal
Environment



Wet
Location



Silent



Dimmable
Lamp



LED
Lamp



Remote
Control




29° Slant
Ceiling Canopy



60° Cathedral
Ceiling Canopy



Unipack
Shipping

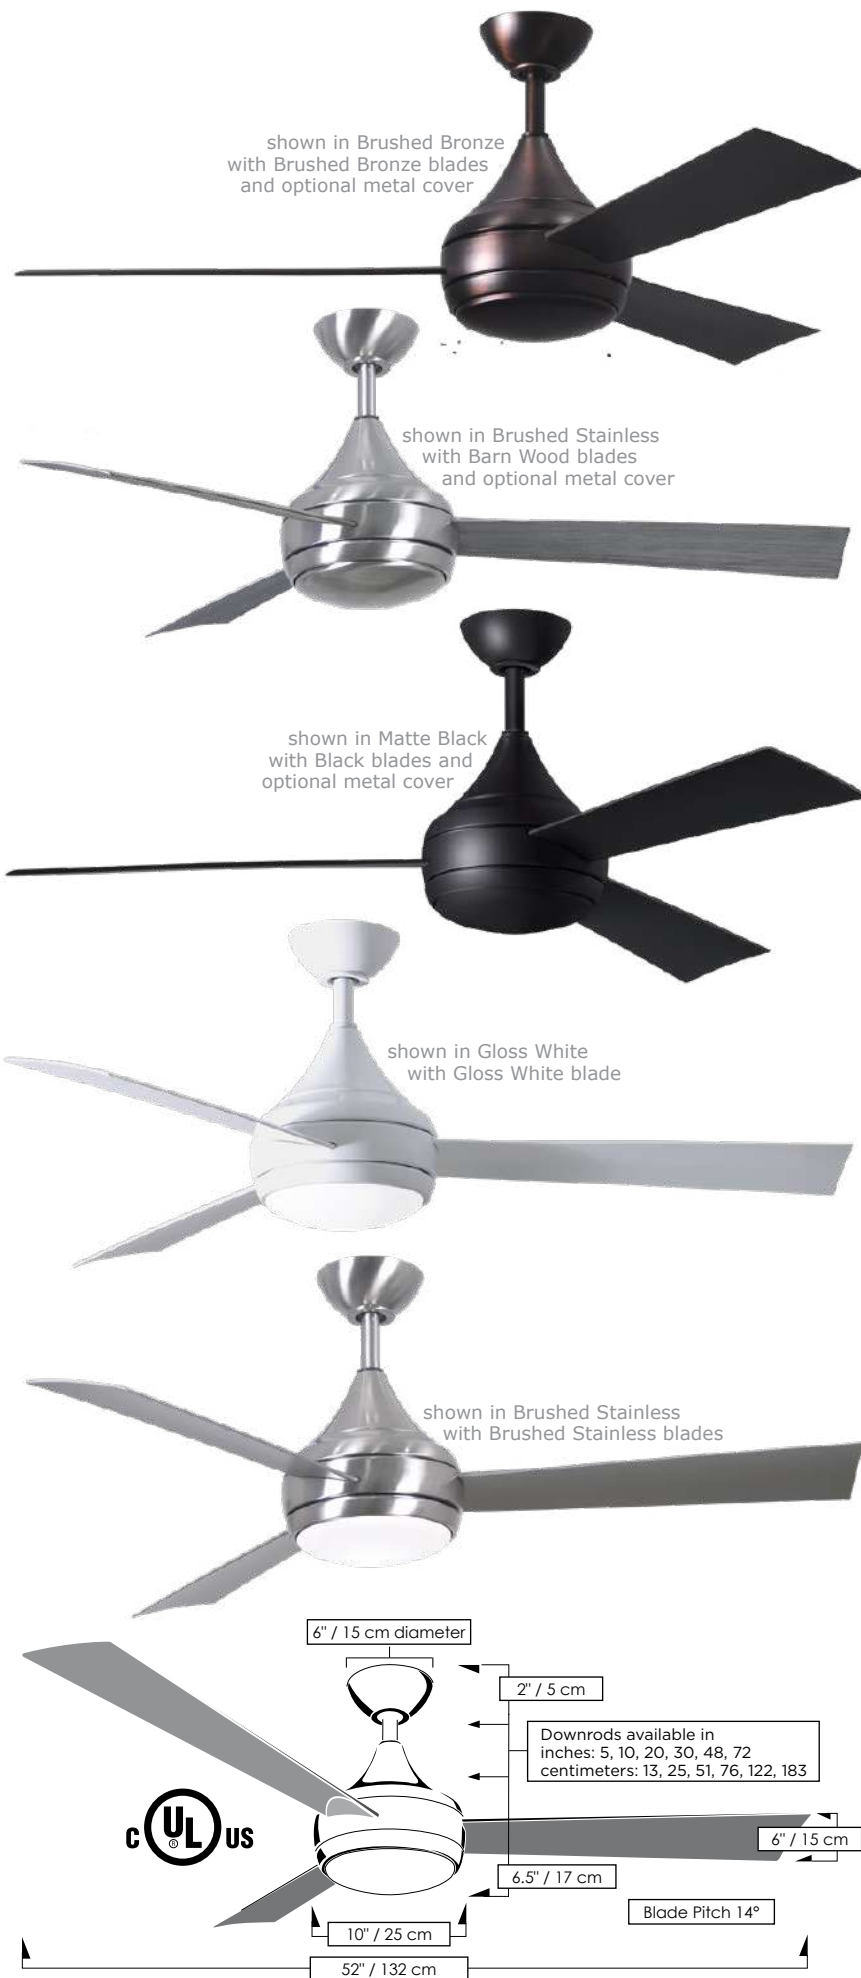

DONAIRE

FINISH AND BLADE OPTIONS

SKU#	DA-XX-XX (Model+Finish+Blade)	
Standard Finishes	Matte Black	BK
	Brushed Bronze	BB
	Brushed Stainless	BS
	Gloss White	WH
Blade Finish	Black	BK
	Barn Wood Tone	BW
	Brushed Bronze	BB
	Brushed Stainless	BS
	Gloss White	WH

TECHNICAL SPECS

Fan Diameter	52 inches / 132 cm
Blade Material	ABS
Overall Drop	8.5 inches / 22 cm + downrod length
Fan Weight	29 lbs
Voltage	110 or 220
Motor Type	AC
Downrods Lengths <i>Field cuttable, Non-Threaded</i>	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Environment	Coastal and wet locations. All weather blade system.
Ambience	Silent
Safety Certification	UL / CUL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

RPM (Low / High)	55 / 172
CFM (Low / High)	1775 / 6013
Watts (High)	58.62
CFM/Watt (High)	111
Blade Pitch	14°

LIGHT KIT PHOTOMETRICS

Lamping (Replaceable)	Integrated LED
Remote Dimmable	Yes
Delivered Temperature in K	3017
Delivered Lumens	725
CRI	90
Watts	16
Hours	60,000

Light kit longevity if used 6 Hours/Day: 27.4 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm
Vaulted ceiling canopy for up to 29°
Light cover

ACCESSORIES

Black 3-speed RF remote control with reverse



Decora-style, 3-speed, non-dimmable wall control



60° cathedral ceiling canopy

Blade Options

Black	Brushed Bronze	Brushed Stainless	Barn Wood	Gloss White
-------	----------------	-------------------	-----------	-------------

shown in Matte Black
with Matte Black blades



Eliza

Geometry in Motion



Designed by Chicago architect Stephen Katz in 2013, the wet location Eliza blends a beautiful technically derived form with superior function and movement. The unique blade shape is designed to maximize air movement at the outer edge of the blade. The result is more efficient air velocity rings, less blade drag and greater motor optimization. Equally important is Eliza's stationary visual statement which combines modern utility with minimalist geometry. Constructed of cast aluminum and heavy stamped steel, the Eliza has a limited lifetime warranty.

Product Features



DC
Motor



Wet
Location



Silent



Remote
Control



Wall
Control



30° Slant
Ceiling Canopy






60° Cathedral
Ceiling Canopy




Unipack
Shipping



ELIZA		
FINISH AND BLADE OPTIONS		
SKU#	EK-XX-XX (Model+Finish+Blade)	
Standard Finishes	Brushed Nickel	BN
	Gloss White	WH
	Matte Black	BK
Blade Finish	Barn Wood	BW
	Brushed Nickel	BN
	Gloss White	WH
	Gray Ash	GA
	Matte Black	BK
	Old Oak	OO
	Walnut	WN
TECHNICAL SPECS		
Fan Diameter	56 inches / 142 cm	
Blade Material	ABS	
Overall Drop	12 inches / 30 cm + downrod length	
Fan Weight	17 lbs	
Voltage	110 or 220	
Motor Type	DC	
Downrods Lengths <i>Field cuttable, non-threaded</i>	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	1 inch	
Environment	Wet locations for all finishes. All weather blade system. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Silent	
Safety Certification	ETL / CETL	
Warranty	Limited Lifetime	
NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		
RPM (Low / High)	55 / 172	
CFM (Low / High)	1633 / 5439	
Watts (High)	33.13	
CFM/Watt (High)	167	
Blade Pitch	27°	
STANDARD EQUIPMENT		
One downrod of 10 inches / 25 cm		
Vaulted ceiling canopy for up to 30°		
Black 6-speed RF remote control with reverse		White wireless Decora-style, 6-speed, wall control with reverse
		
ACCESSORY	60° cathedral ceiling canopy	
NOTE: Only compatible with included controllers.		

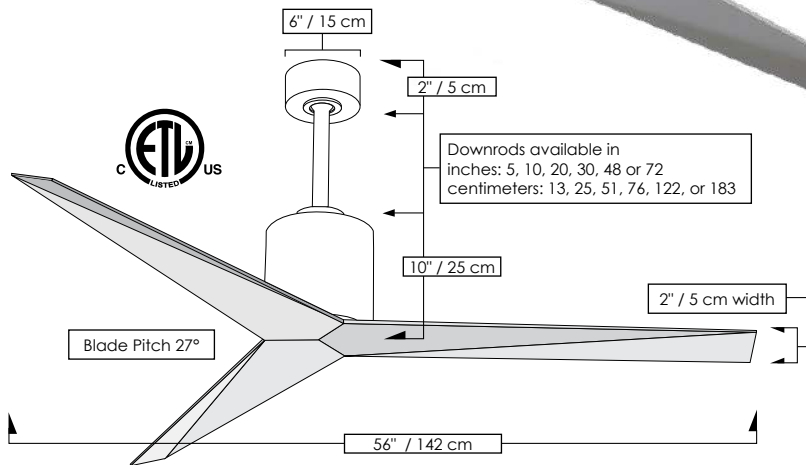

Blade Options

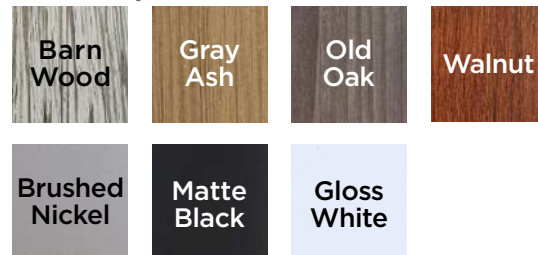

shown in Gloss White
with Gloss White blades



Eliza-H

Geometry in Motion

Designed by Chicago architect Stephen Katz in 2014, the Eliza-H ceiling-mount fan blends a beautiful technically derived form with superior function and movement. The unique blade shape is designed to maximize air movement at the outer edge of the blade. The result is more efficient air velocity rings, less blade drag and greater motor optimization. Equally important is Eliza-H's stationary visual statement which combines modern utility with minimalist geometry. Constructed of cast aluminum and heavy stamped steel, the Eliza-H has a limited lifetime warranty.

Product Features



DC
Motor



Damp
Location



Silent




Remote
Control



Wall
Control



Unpack
Shipping

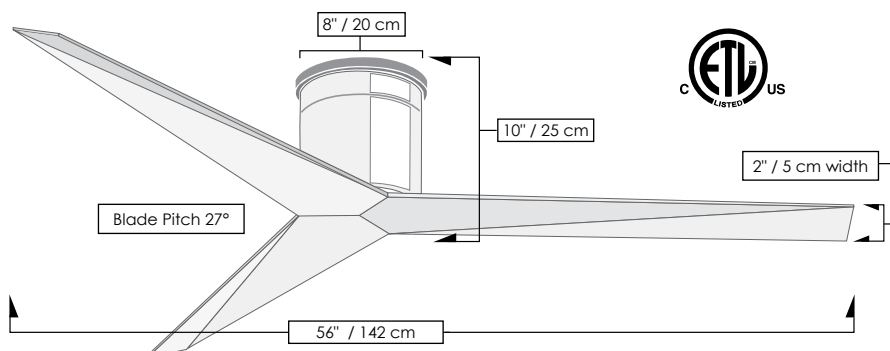

ELIZA-H

FINISH AND BLADE OPTIONS

SKU#	EKH-XX-XX (Model+Finish+Blade)	
Standard Finishes	Brushed Nickel	BN
	Gloss White	WH
	Matte Black	BK
Blade Finish	Barn Wood	BW
	Brushed Nickel	BN
	Gloss White	WH
	Gray Ash	GA
	Matte Black	BK
	Old Oak	OO
	Walnut	WN

TECHNICAL SPECS

Fan Diameter	56 inches / 142 cm
Blade Material	ABS
Overall Drop	10 inches / 25 cm
Fan Weight	14 lbs
Voltage	110 or 220
Motor Type	DC
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.
Ambience	Silent
Safety Certification	ETL / CETL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

RPM (Low / High)	52 / 175
CFM (Low / High)	1123 / 4034
Watts (High)	33.49
CFM/Watt (High)	122
Blade Pitch	27°

STANDARD EQUIPMENT

Black 6-speed RF remote control with reverse




White wireless Decora-style, 6-speed, wall control with reverse



NOTE: Only compatible with included controllers.

Blade Options

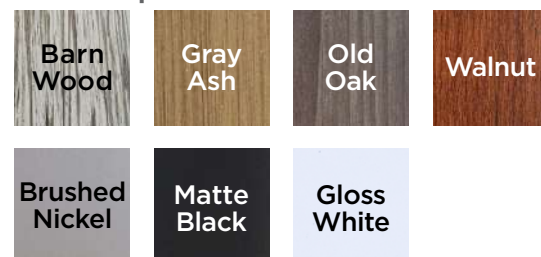

shown in Matte Black
with 52" Matte Black blades



Irene-3

The Irene-3 is rustic, yet strikingly modern with three neatly joined, solid matte black, matte white, walnut, or barn wood tone blades. A spherical motor housing complements its minimal profile. Irene-3 is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-3 has a limited lifetime warranty.

Product Features



DC
Motor



Damp
Location



Silent



Remote
Control




30° Slant
Ceiling Canopy



60° Cathedral
Ceiling Canopy



Wall
Control

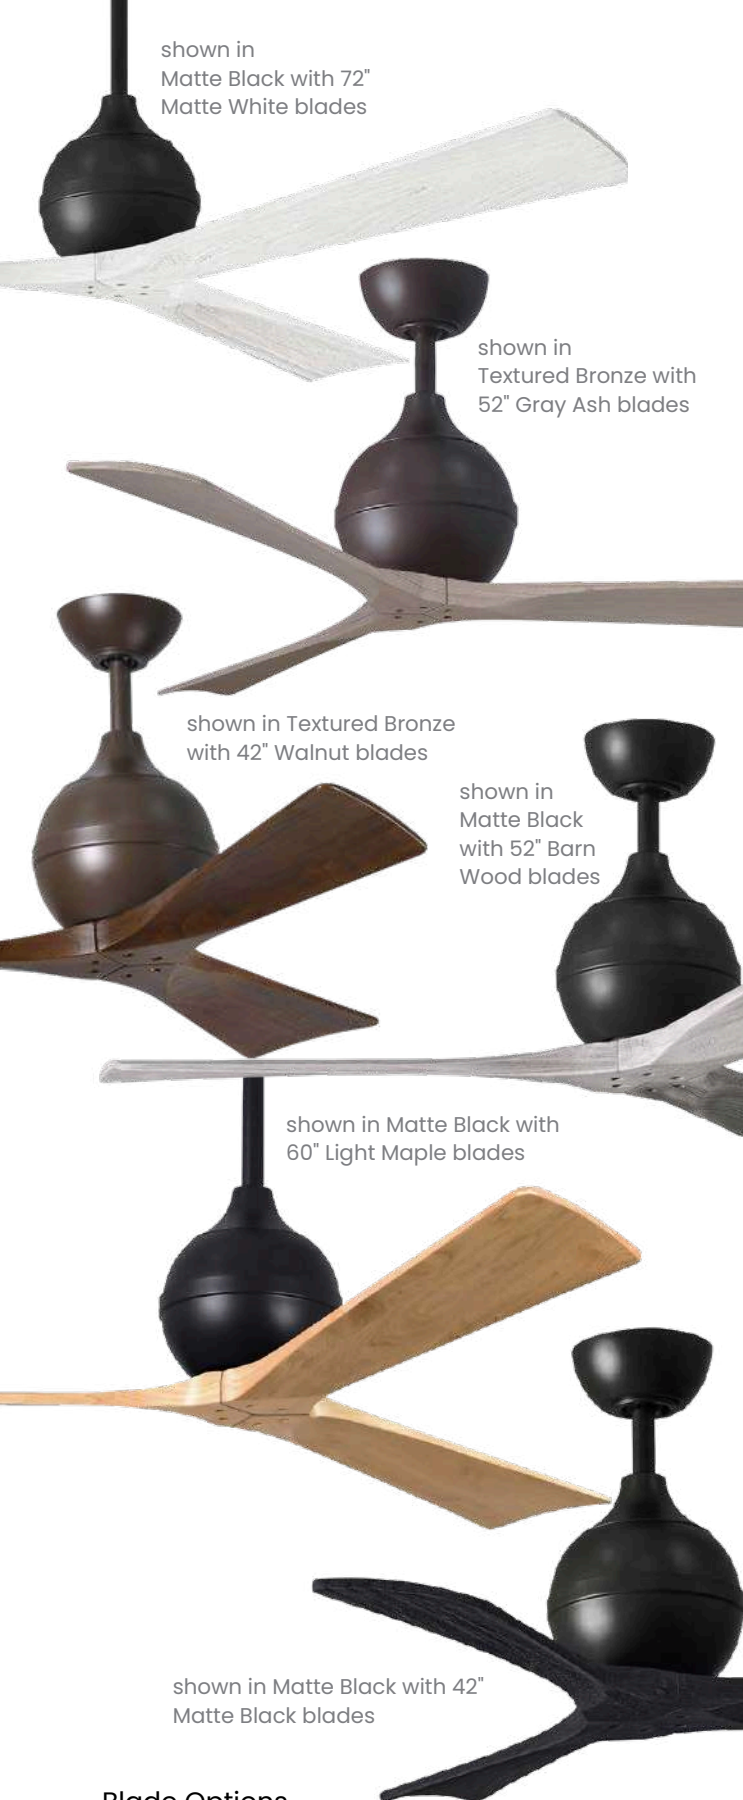

Blade Options



IRENE - 3

FINISH AND BLADE OPTIONS

SKU#	SS-XXXX-XXX-XX (Model+Finish+Blade+Diameter)	
Standard Finishes	Matte Black Textured Bronze	BK TB
Blade Finishes	Barn Wood Tone Gray Ash Light Maple Matte Black Matte White Walnut Tone	BW GA LM BK MWH WA
Fan Diameter	42 inches / 107 cm 52 inches / 132 cm 60 inches / 152 cm 72 inches / 183 cm	42 52 60 72

TECHNICAL SPECS

Fan Diameter	inches: 42, 52, 60, or 72 centimeters: 107, 132, 152, or 183
Blade Material	CNC Cut Solid Wood
Overall Drop	12 inches / 30 cm + downrod length
Fan Weight	17 lbs
Downrods Lengths Field cuttable. Non- threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Voltage	110 or 220
Motor Type	AC
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible
Ambience	Silent
Safety Certification	ETL / CETL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Diameter	42 inch / 107cm	52 inch / 132cm	60 inch / 152cm	72 inch / 183cm
RPM (Low / High)	52 / 231	51 / 196	52 / 160	49 / 109
CFM (Low / High)	541 / 3517	1531 / 6168	2088 / 6984	3443 / 8224
Watts (High)	17.08	32.12	31.67	32.97
CFM/Watt (High)	163	185	218	279
Blade Pitch	15°	15°	15°	16°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm	
Vaulted ceiling canopy for up to 30°	
Black 6-speed RF remote control with reverse	White wireless Decora-style, 6-speed, wall control with reverse


ACCESSORY

60° cathedral ceiling canopy

NOTE: Only compatible with included controllers.

Irene-3

TECHNICAL SPECIFICATIONS

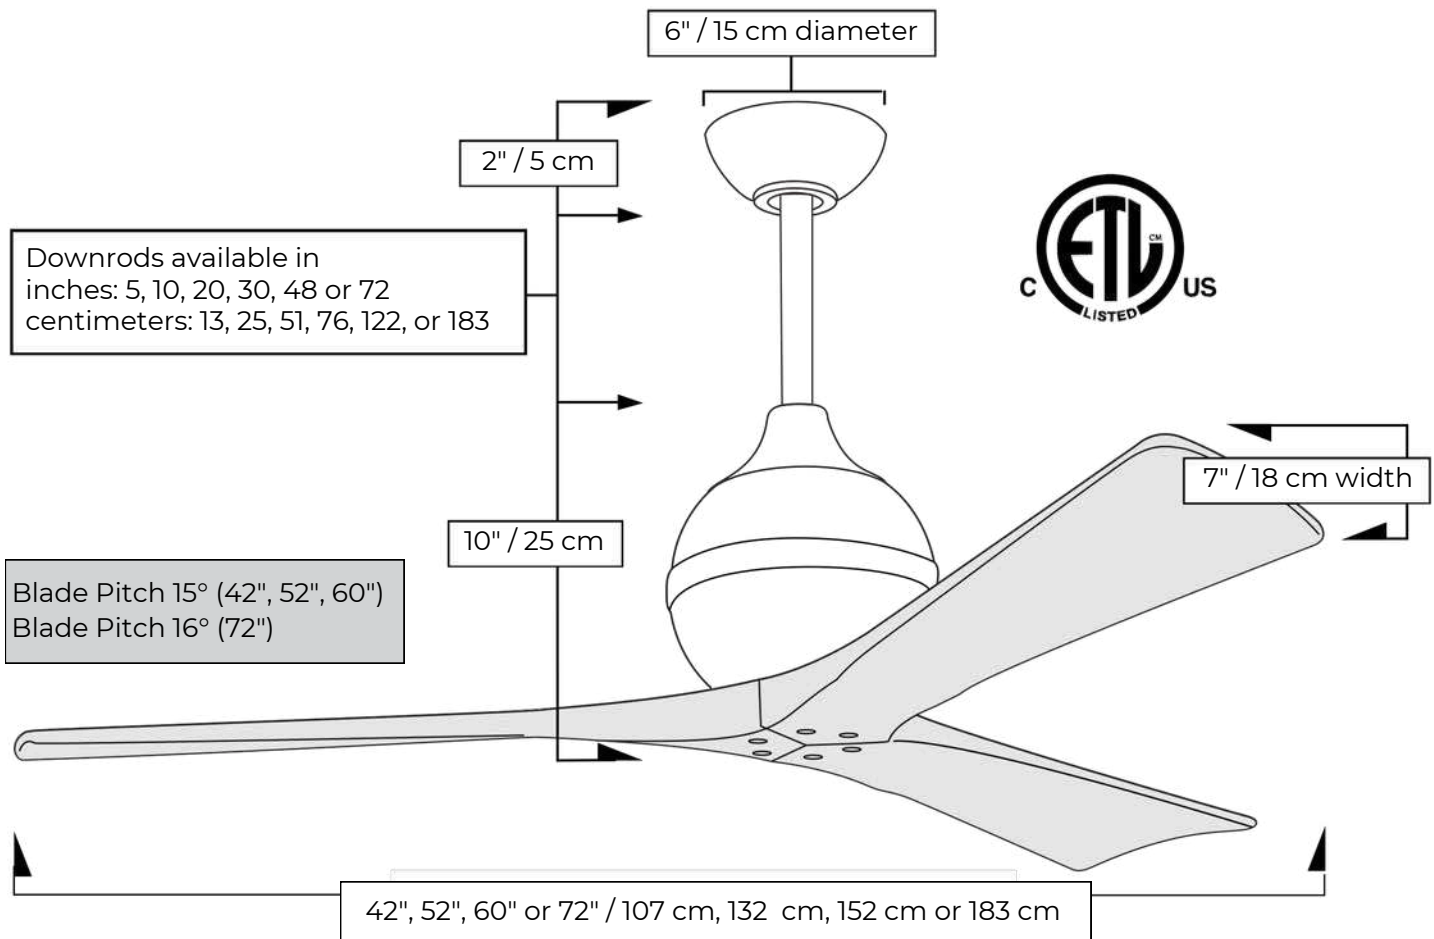

CEILING PITCH TABLE

0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

CEILING HEIGHT / DOWNROD TABLE

Ceiling Height	Downrod Lengths <i>Field cuttable. Non-threaded</i>
10 ft or less	5 inches / 13 cm <i>Use safety cages if applicable</i>
10 -12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm
15 feet	48 inches / 122 cm
16 feet +	72 inches / 183 cm

Matthews Fan Company

1881 Industrial Drive

Libertyville, IL 60048

Tele: 847.680.9043

Fax: 847.680.8140

www.matthewsfanco.com

© 2023 Matthews Fan Company. All rights reserved.



shown in Gloss White
with 42" Barn Wood blades



Irene-3H

The Irene-3H ceiling-mount fan is rustic, yet strikingly modern with three neatly joined, solid wood matte black, matte white, walnut, or barn wood tone blades. A cylindrical motor housing complements its minimal profile. Irene-3H is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-3H has a limited lifetime warranty.

Product Features



DC
Motor



Damp
Location



Silent



Remote
Control



Wall
Control



IRENE - 3H

FINISH AND BLADE OPTIONS

SKU#	IR3H-XXXX-XXX-XX (Model+Finish+Blade+Diameter)	
Standard Finishes	Barn Wood	BW
	Brushed Brass	BRBR
	Brushed Bronze	BB
	Brushed Nickel	BN
	Brushed Pewter	BP
	Gloss White	WH
	Light Maple	LM
	Matte Black	BK
	Polished Chrome	CR
	Textured Bronze	TB
	Walnut	WN
Blade Finishes	Barn Wood Tone	BW
	Gray Ash	GA
	Light Maple	LM
	Matte Black	BK
	Matte White	MWH
	Walnut Tone	WA
Fan Diameter	42 inches / 107 cm	42
	52 inches / 132 cm	52
	60 inches / 152 cm	60
	72 inches / 183 cm	72

TECHNICAL SPECS

Fan Diameter	inches: 42, 52, 60, or 72 centimeters: 107, 132, 152, or 183
Blade Material	CNC Cut Solid Wood
Overall Drop	10 inches / 25 cm
Fan Weight	11 lbs
Voltage	110 or 220
Motor Type	DC
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible
Ambience	Silent
Safety Certification	ETL / CETL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Diameter	42 inch / 107cm	52 inch / 132cm	60 inch / 152cm	72 inch / 183cm
RPM (Low / High)	51 / 231	51 / 196	52 / 155	50 / 109
CFM (Low / High)	746 / 3743	1254 / 5326	1755 / 5720	2674 / 6085
Watts (High)	17.61	32.38	32.08	30.47
CFM/Watt (High)	176	160	181	219
Blade Pitch	15°	15°	15°	15°

STANDARD EQUIPMENT

Black 6-speed RF remote control with reverse



White wireless Decora-style, 6-speed, wall control with reverse




Blade Options



Irene-3H

TECHNICAL SPECIFICATIONS

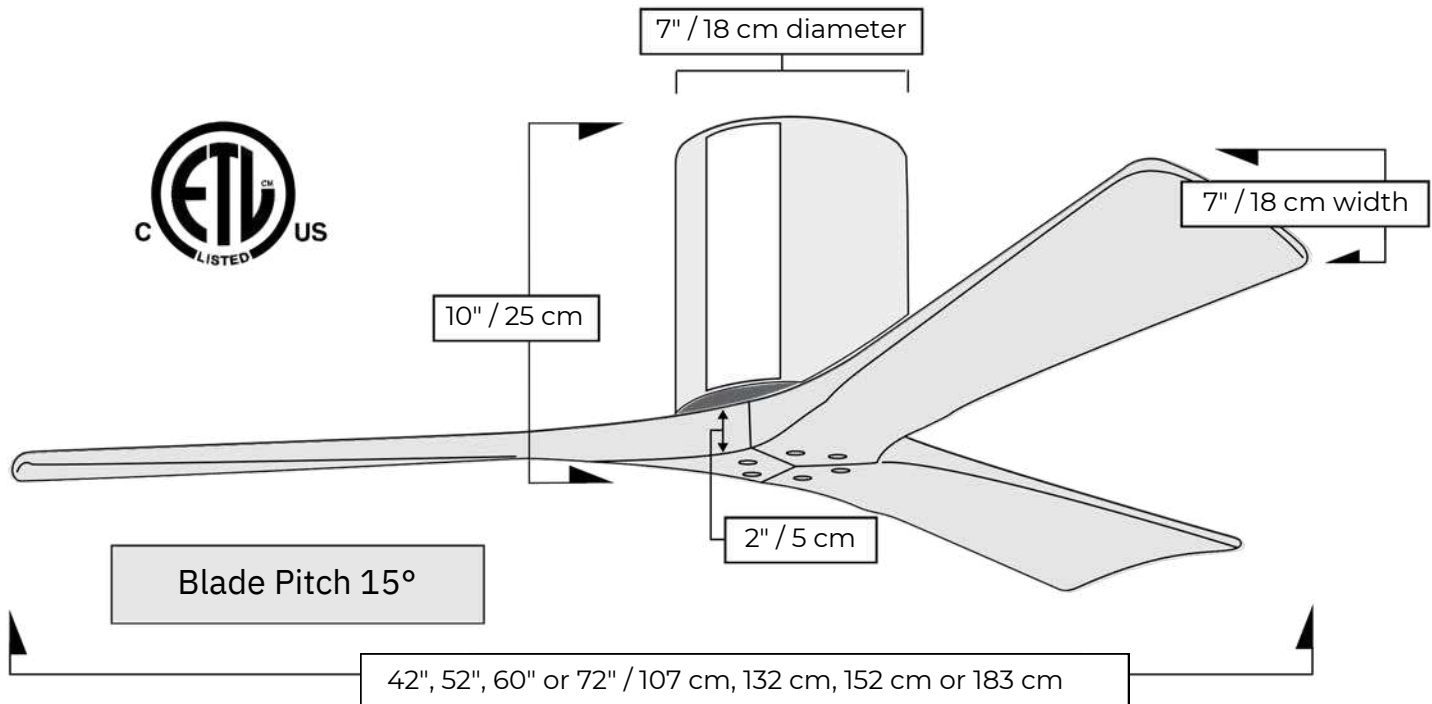

CEILING PITCH TABLE

0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

CEILING HEIGHT TABLE

Suitable for ceiling heights 7'10" or greater

shown in Brushed Brass
with 52" Walnut blades



Irene-3HLK

The Irene-3HLK ceiling-mount fan is rustic, yet strikingly modern with three neatly joined, solid wood matte black, matte white, walnut, or barn wood tone blades. A cylindrical motor housing complements its minimal profile. Irene-3HLK is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-3HLK has a limited lifetime warranty.

Product Features



DC
Motor



Damp
Location



Silent



LED
Lamp



Dimmable
Lamp



Remote
Control



Wall
Control



IRENE - 3HLK

FINISH AND BLADE OPTIONS

SKU#	IR3HLK-XXXX-XXX-XX (Model+Finish+Blade+Diameter)	
Standard Finishes	Barn Wood Tone	BW
	Brushed Brass	BRBR
	Brushed Bronze	BB
	Brushed Nickel	BN
	Brushed Pewter	BP
	Gloss White	WH
	Light Maple Tone	LM
	Matte Black	BK
	Polished Chrome	CR
	Textured Bronze	TB
	Walnut Tone	WN
Blade Finishes	Barn Wood Tone	BW
	Matte Black	BK
	Matte White	MWH
	Walnut Tone	WA
Fan Diameter	42 inches / 107 cm	42
	52 inches / 132 cm	52
	60 inches / 152 cm	60

TECHNICAL SPECS

Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152
Blade Material	CNC Cut Solid Wood
Overall Drop	12 inches / 30 cm
Fan Weight	12 lbs
Voltage	110 or 220
Motor Type	DC
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible
Ambience	Silent
Safety Certification	ETL / CETL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Diameter	42 inch / 107cm	52 inch / 132cm	60 inch / 152cm
RPM (Low / High)	51 / 231	51 / 196	52 / 155
CFM (Low / High)	746 / 3743	1254 / 5326	1755 / 5720
Watts (High)	17.61	32.38	32.08
CFM/Watt (High)	176	160	181
Blade Pitch	15°	15°	15°

LIGHT KIT PHOTOMETRICS

Lamping (Replaceable)	Integrated LED
Remote Dimmable	YES
Delivered Temperature in K	5CCT (*see Delivered Lumens)
CRI	90
Watts	22
Hours	30,000

*Delivered Lumens

2700K	3000K	4000K	5000K	6500K
1063	1088	1234	1221	1107

STANDARD EQUIPMENT

Light Cover

Black 6-speed RF remote control with reverse



White wireless Decora-style, 6-speed, wall control with reverse



NOTE: Only compatible with included controllers.

Blade Options



shown in Matte Black
with 60" Barn Wood blades



Irene-5



The Irene-5 is rustic, yet strikingly modern with five neatly joined, solid wood matte black, matte white, walnut, or barn wood tone blades. A spherical motor housing complements its minimal profile. Irene-5 is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-5 has a limited lifetime warranty.

Product Features



DC
Motor



Damp
Location



Silent



Remote
Control



Wall
Control



30° Slant
Ceiling Canopy



60° Cathedral
Ceiling Canopy




shown in Matte Black
with 42" Gray Ash blades

shown in Matte Black
with 42" Light Maple blades

shown in Textured Bronze
with 52" Matte White blades

shown in Textured Bronze
with 52" Walnut blades

shown in Textured Bronze
with 42" Matte Black blades

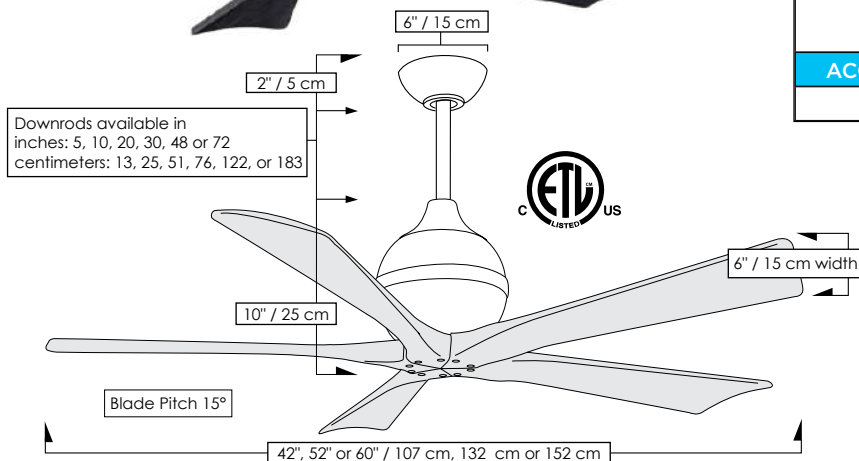

IRENE-5

FINISH AND BLADE OPTIONS

SKU#	IR5-XX-XXX-XX (Model+Finish+Blade+Diameter)	
Standard Finishes	Matte Black	BK
	Textured Bronze	TB
Blade Finishes	Barn Wood Tone	BW
	Gray Ash	GA
	Light Maple	LM
	Matte Black	BK
	Matte White	MWH
	Walnut Tone	WA
Fan Diameter	42 inches / 107 cm	42
	52 inches / 132 cm	52
	60 inches / 152 cm	60

TECHNICAL SPECS

Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152
Blade Material	CNC Cut Solid Wood
Overall Drop	12 inches / 30 cm + downrod length
Fan Weight	18 lbs
Downrods Lengths <i>Field cuttable. Non-threaded</i>	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Voltage	110 or 220
Motor Type	DC
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.
Ambience	Silent
Safety Certification	ETL / CETL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Diameter	42 inch / 107 cm	52 inch / 132 cm	60 inch / 152 cm
RPM (Low / High)	52 / 229	51 / 156	52 / 77
CFM (Low / High)	852 / 4261	1784 / 5783	3328 / 5006
Watts (High)	25.33	32.18	31.38
CFM/Watt (High)	150	179	175
Blade Pitch	15°	15°	15°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 30°

6-speed RF
remote control
w/reverse in black




Wireless
Decora-style,
6-speed, wall
control in white



ACCESSORY 60° cathedral ceiling canopy

NOTE: Only compatible with included controllers.

Blade Options

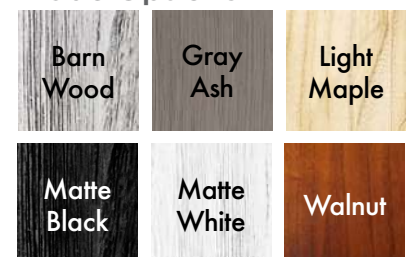



shown in Brushed Pewter
with 60" Gray Ash blades



Irene-5H

The Irene-5H ceiling-mount fan is rustic, yet strikingly modern with five neatly joined, solid wood, matte black, matte white, gray ash, light maple, walnut, or barn wood tone blades. A cylindrical motor housing complements its minimal profile. Irene-5H is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-5H has a limited lifetime warranty.

Product Features



DC
Motor



Damp
Location



Silent



Remote
Control




Wall
Control





Blade Options

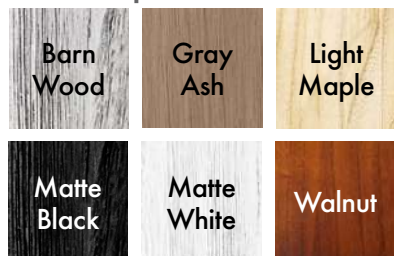

IRENE-5H

FINISH AND BLADE OPTIONS

SKU#	IR5H-XXXX-XXX-XX (Model+Finish+Blade+Diameter)	
Standard Finishes	Barn Wood	BW
	Brushed Brass	BRBR
	Brushed Bronze	BB
	Brushed Nickel	BN
	Brushed Pewter	BP
	Gloss White	WH
	Light Maple	LM
	Matte Black	BK
	Polished Chrome	CR
	Textured Bronze	TB
	Walnut	WN
Blade Finishes	Barn Wood Tone	BW
	Gray Ash	GA
	Light Maple	LM
	Matte Black	BK
	Matte White	MWH
	Walnut Tone	WA
Fan Diameter	42 inches / 107 cm	42
	52 inches / 132 cm	52
	60 inches / 152 cm	60

TECHNICAL SPECS

Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152
Blade Material	CNC Cut Solid Wood
Overall Drop	10 inches / 25 cm
Fan Weight	12 lbs
Voltage	110 or 220
Motor Type	DC
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.
Ambience	Silent
Safety Certification	ETL / CETL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Diameter	42 inch / 107 cm	52 inch / 132 cm	60 inch / 152 cm
RPM (Low / High)	51 / 226	51 / 151	51 / 78
CFM (Low / High)	855 / 3989	1631 / 4970	2201 / 3543
Watts (High)	25.76	31.46	31.58
CFM/Watt (High)	193	162	123
Blade Pitch	15°	15°	15°

STANDARD EQUIPMENT


6-speed RF
remote control
w/reverse in black



Wireless
Decora-style,
6-speed, wall
control in white



NOTE: Only compatible with included controllers.

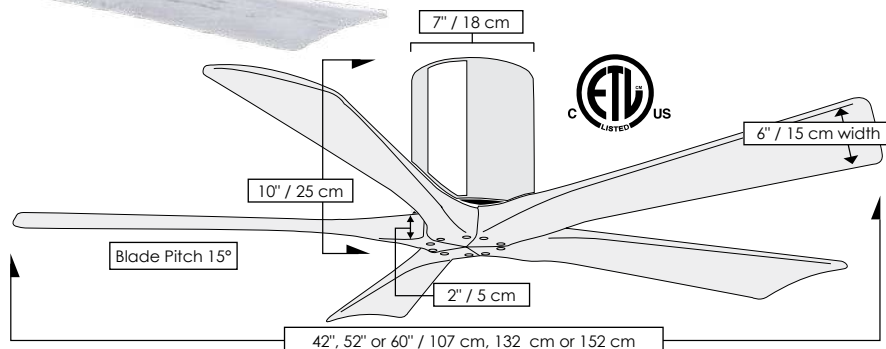

shown in Gloss White
with 60" walnut blades



Irene-5HLK



The Irene-5HLK ceiling-mount fan is rustic, yet strikingly modern with five neatly joined, solid wood matte black, matte white, walnut, or barn wood tone blades. A cylindrical motor housing complements its minimal profile. Irene-5HLK is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-5HLK has a limited lifetime warranty.

Product Features



DC
Motor



Damp
Location



Silent



LED
Lamp



Dimmable
Lamp



Remote
Control



Wall
Control

shown in Light Maple Tone
with 52" Matte Black blades

shown in Textured Bronze
with 42" Walnut Tone blades

shown in Barn Wood Tone
with 42" Matte White blades

shown in Polished Chrome
with 42" Walnut Tone blades

shown in Brushed Bronze
with 42" Matte Black blades

shown in Brushed Brass
with 42" Matte White
blades

shown in Brushed Nickel
with 42" Barn Wood Tone
blades

shown in Matte Black with
52" Matte Black blades

IRENE - 5HLK

FINISH AND BLADE OPTIONS

SKU#	IR5HLK-XXXX-XXX-XX (Model+Finish+Blade+Diameter)	
Standard Finishes	Barn Wood Tone	BW
	Brushed Brass	BRBR
	Brushed Bronze	BB
	Brushed Nickel	BN
	Brushed Pewter	BP
	Gloss White	WH
	Light Maple Tone	LM
	Matte Black	BK
	Polished Chrome	CR
	Textured Bronze	TB
Blade Finishes	Barn Wood Tone	BW
	Matte Black	BK
	Matte White	MWH
	Walnut Tone	WA
Fan Diameter	42 inches / 107 cm	42
	52 inches / 132 cm	52
	60 inches / 152 cm	60

TECHNICAL SPECS

Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152
Blade Material	CNC Cut Solid Wood
Overall Drop	12 inches / 30 cm
Fan Weight	13 lbs
Voltage	110 or 220
Motor Type	DC
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible
Ambience	Silent
Safety Certification	ETL / CETL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Diameter	42 inch / 107cm	52 inch / 132cm	60 inch / 152cm
RPM (Low / High)	51 / 220	51 / 179	51 / 88
CFM (Low / High)	861 / 4215	1212 / 4749	2116 / 3660
Watts (High)	31.66	31.12	30.78
CFM/Watt (High)	127	150	132
Blade Pitch	15°	15°	15°

LIGHT KIT PHOTOMETRICS

Lamping (Replaceable)	Integrated LED
Remote Dimmable	YES
Delivered Temperature in K	5CCT (*see Delivered Lumens)
CRI	90
Watts	22
Hours	30,000

*Delivered Lumens

2700K	3000K	4000K	5000K	6500K
1063	1088	1234	1221	1107

STANDARD EQUIPMENT

Light Cover

Black 6-speed RF
remote control with
reverse




White wireless
Decora-style,
6-speed, wall
control with
reverse



NOTE: Only compatible with included controllers.

Blade Options

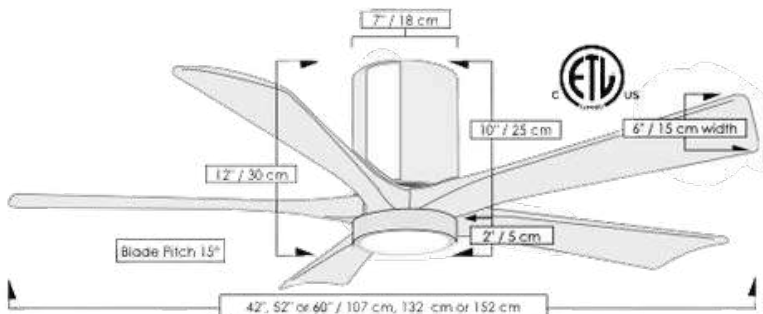



shown in Textured Bronze



Kaye

The beautiful Kaye 3-speed versatile-mount, wall or ceiling fan, oscillates left to right, forward and reverse, in a 90° sweep. Its design is reminiscent of vintage train cabin ventilators of yester-year, and will cool down your favorite space with poise and determination. Kaye's profile is low, however its strength and character define it. Kaye can be mounted in any small or awkward spaces or in front of HVAC ducts to improve the efficiency of the heating, ventilation or air conditioning of your favorite space. Constructed of cast aluminum and heavy stamped steel, the Kaye carries a limited lifetime warranty.

Product Features



American
Labor



AC
Motor



90°
Oscillation



Safety Cage
Equipped



Ceiling
Mount



Wall
Mount



Damp
Location



Soothing
White Noise



Wall
Control



Unipack
Shipping



KAYE

FINISH AND BLADE OPTIONS

SKU#	KC-XX (Model+Finish)	
Finishes	Brushed Nickel	BN
	Matte Black	BK
	Polished Chrome	CR
	Textured Bronze	TB
	Gloss White	WH



TECHNICAL SPECS

Fan Weight	10.5 lbs
Blade Material	Metal / ABS
Voltage	110 or 220
Motor Type	AC
Oscillation	Yes
Fan Diameter	13 inches / 33 cm
Fan Height	13 inches / 33 cm
Fan Projection	17.5 inches / 44 cm
Ceiling Mount Overall Drop	17.5 inches / 44 cm
Recommended Mounting Height	Approximately 24 inches / 61 cm from ceiling
Fan Guard	Safety Cage
Blade Pitch	31°
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.
Ambience	Soothing White Noise
Safety Certification	ETL / CETL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

RPM (Low / High)	1213 / 1445
CFM (Low / High)	868 / 1303
Watts (High)	47.68
CFM/Watt (High)	29
Blade Pitch	31°

STANDARD EQUIPMENT

Safety cage	
Side-mounted wall junction box	
White Decora-style, 3-speed wall control 	ACCESSORY
	Black 3-speed RF remote control 

Note:

- 1) A three-wire system is needed to operate the oscillation mechanism independent of the fan blades.
- 2) The remote control receiver will not fit behind the wall canopy. A clever electrician will need to hide the receiver in wall or ceiling according to code.



shown in Textured Bronze



Laura



The Laura 3-speed, left-to-right 90 degree oscillating wall fan offers the best in function. Its patented design boasts a whisper-quiet DC motor, remote control operation and easy 2-wire installation. Compact and powerful, Laura can be mounted in small, awkward spaces or in front of HVAC ducts to improve the efficiency of heating, ventilation or air conditioning. Constructed of cast aluminum and heavy stamped steel, Laura carries a limited lifetime warranty.

Product Features



American
Labor



110-240V
DC Motor



90°
Oscillation



Safety Cage
Equipped



Damp
Location



Soothing
White Noise



Remote
Control



Unipack
Shipping

shown in
Textured Bronze

shown in
Matte Black

shown in
Brushed Nickel



LAURA

FINISH AND BLADE OPTIONS

SKU#	LL-XX (Model+Finish)	
Finishes	Brushed Nickel Matte Black Textured Bronze	BN BK TB


TECHNICAL SPECS


Fan Weight	12 lbs
Blade Material	Metal / ABS
Voltage	110 - 240
Motor Type	DC
Oscillation	Yes
Fan Diameter	16 inches / 41 cm
Fan Height	14.5 inches / 37 cm
Fan Projection	19.5 inches / 50 cm
Recommended Mounting Height	Approximately 24 inches / 61 cm from ceiling
Fan Guard	Safety Cage
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.
Ambience	Soothing White Noise
Safety Certification	UL / CUL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

RPM (Low / High)	1231 / 1520
CFM (Low / High)	1056 / 1600
Watts (High)	28.1
CFM/Watt (High)	56.94
Blade Pitch	31°

STANDARD EQUIPMENT

Safety cage	
Side-mounted wall junction box	
Black 3-speed RF remote control	
<p>Note:</p> <p>1) Two-wire system required to operate the oscillation mechanism independent of the fan blades. Three-wire system not needed.</p> <p>2) Receiver already hidden in motor canopy.</p>	

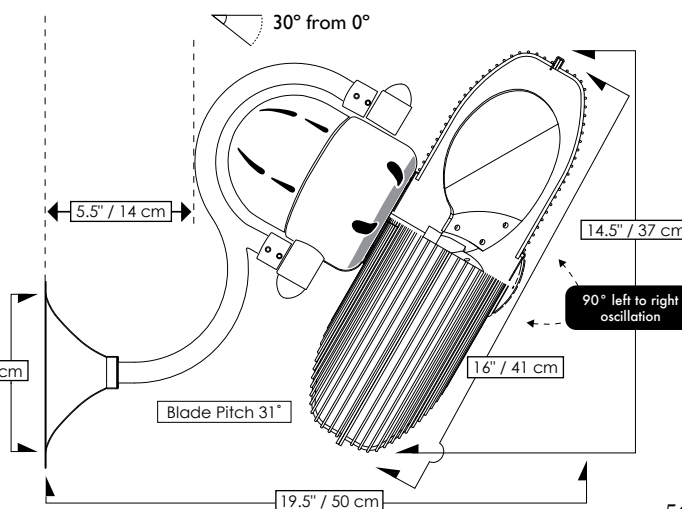

shown in Textured Bronze
with Walnut blades



Lindsay

The Lindsay ceiling fan offers a simple, yet refined air flow solution to any space. The two elegant, solid wood blades quietly circulate air as they revolve around an understated central motor housing. Integrated into the design is an eco-friendly, dimmable LED light kit which will provide illumination for decades to come. The Lindsay is available in matte black, matte white and textured bronze finishes. Blade finish options are barn wood, matte black, matte white or walnut. Constructed of cast aluminum and heavy stamped steel, Lindsay carries a limited lifetime warranty.

Product Features



DC
Motor



Damp
Location



Silent



LED
Lamp



Dimmable
Lamp



Remote
Control



Wall
Control



Unipack
Shipping

shown in
Matte Black
with Matte Black blades



shown in
Textured Bronze
with Walnut blades



shown in Matte White
with Matte White blades



shown in Matte White
with Barn Wood blades



LINDSAY

FINISH AND BLADE OPTIONS

SKU#	LW-XXX-XXX (Model+Finish+Blade)	
Standard Finishes	Matte Black Matte White Textured Bronze	BK MWH TB
Blade Finish	Barn Wood Matte Black Matte White Walnut	BW BK MWH WN

TECHNICAL SPECS

Fan Diameter	52 inches / 132 cm
Blade Material	CNC Cut Solid Wood
Overall Drop	12 inches / 30 cm
Fan Weight	11 lbs
Voltage	110 (Please contact us for 220V)
Motor Type	DC
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.
Ambience	Silent
Safety Certification	ETL / CETL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

RPM (Low / High)	51 / 220
CFM (Low / High)	1097 / 4955
Watts (High)	29.61
CFM/Watt (High)	166
Blade Pitch	45°

LIGHT KIT PHOTOMETRICS

Lamping (Replaceable)	Integrated LED
Remote Dimmable	Yes
Delivered Temperature in K	2940
Delivered Lumens	557
CRI	93.7
Watts	17
Hours	37,000

Light kit longevity if used 6 Hours/Day: 16.9 Years

STANDARD EQUIPMENT

Black 6-speed RF remote control with reverse




White wireless Decora-style, 6-speed, wall control




NOTE: Only compatible with included controllers.



Blade Pitch 45°

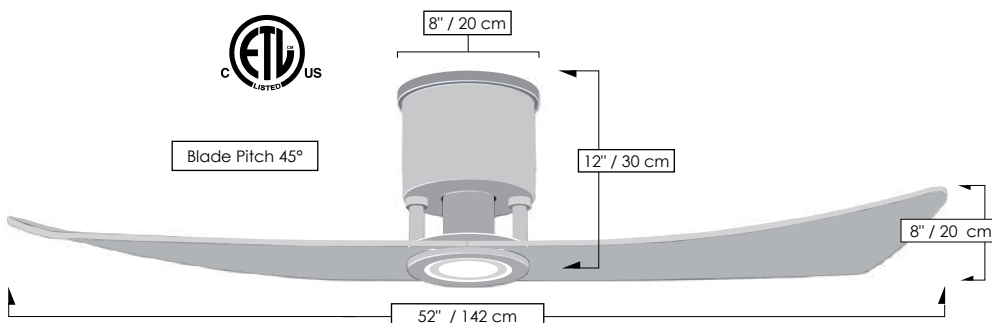

Blade Options





shown in Matte Black



Melody

The oscillating Melody, 3-speed wall-mounted fan, designed in the Art Nouveau style with a grand, arching gooseneck, provides maximum multi-directional airflow with its 90° left to right sweep. Melody can be mounted in small, awkward spaces or in front of HVAC ducts to improve the efficiency of the heating, ventilation or air conditioning of any space. Constructed of cast aluminum and heavy stamped steel, the Melody carries a limited lifetime warranty.

Product Features



American
Labor



AC
Motor



90°
Oscillation



Safety Cage
Equipped



Damp
Location



Soothing
White Noise



Wall
Control




Unipack
Shipping



shown in
Matte Black



shown in
Textured Bronze

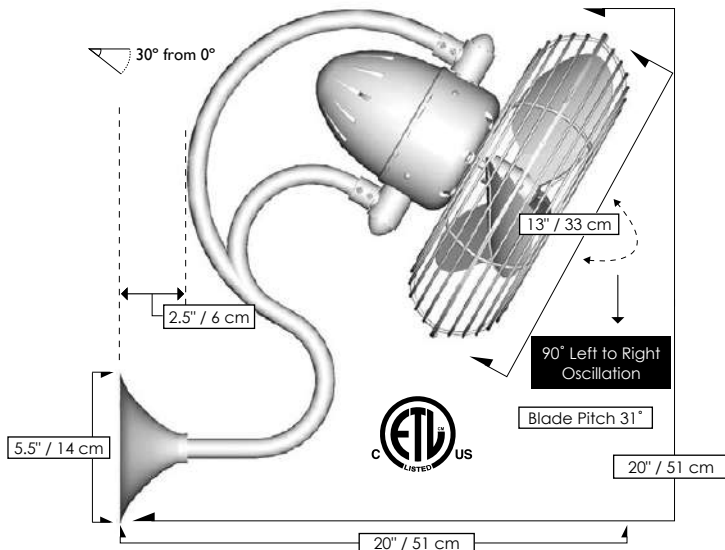

MELODY

FINISH AND BLADE OPTIONS

SKU#	ME-XX (Model+Finish)	
Finishes	Matte Black Textured Bronze	BK TB

TECHNICAL SPECS

Fan Weight	14 lbs
Blade Material	Metal / ABS
Voltage	110 or 220
Motor Type	AC
Oscillation	Yes
Fan Diameter	13 inches / 33 cm
Fan Height	20 inches / 51 cm
Fan Projection	20 inches / 51 cm
Recommended Mounting Height	Approximately 24 inches / 61 cm from ceiling
Fan Guard	Safety Cage
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.
Ambience	Soothing White Noise
Safety Certification	ETL / CETL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

RPM (Low / High)	1213 / 1495
CFM (Low / High)	868 / 1303
Watts (High)	47.68
CFM/Watt (High)	27.32
Blade Pitch	31°

STANDARD EQUIPMENT

Safety cage	
Side-mounted wall junction box	
Decora-style, 3-speed wall control in white	ACCESSORY Black 3-speed RF remote control

Note:

- 1) A three-wire system is needed to operate the oscillation mechanism independent of the fan blades.
- 2) The remote control receiver will not fit behind the wall canopy. A clever electrician will need to hide the receiver in wall or ceiling according to code.

shown in Matte Black



Molly

Designed by Chicago architect Stephen Katz in 2018, the Molly ceiling fan combines modern organic geometry with outstanding performance and function. The blade shape was developed using advanced computer software which allowed the design to achieve a complex form. The result is a clean, natural and contemporary look perfect for any room or décor. Available in gloss white or matte black finish, Molly will complement a variety of design styles while also providing a fresh and unique, modern statement. Constructed of cast aluminum and heavy stamped steel, the Molly carries a limited lifetime warranty.

Product Features



DC Motor



Damp Location



Silent



Remote Control



Wall Control




30° Slant Ceiling Canopy



60° Cathedral Ceiling Canopy



Unipack Shipping

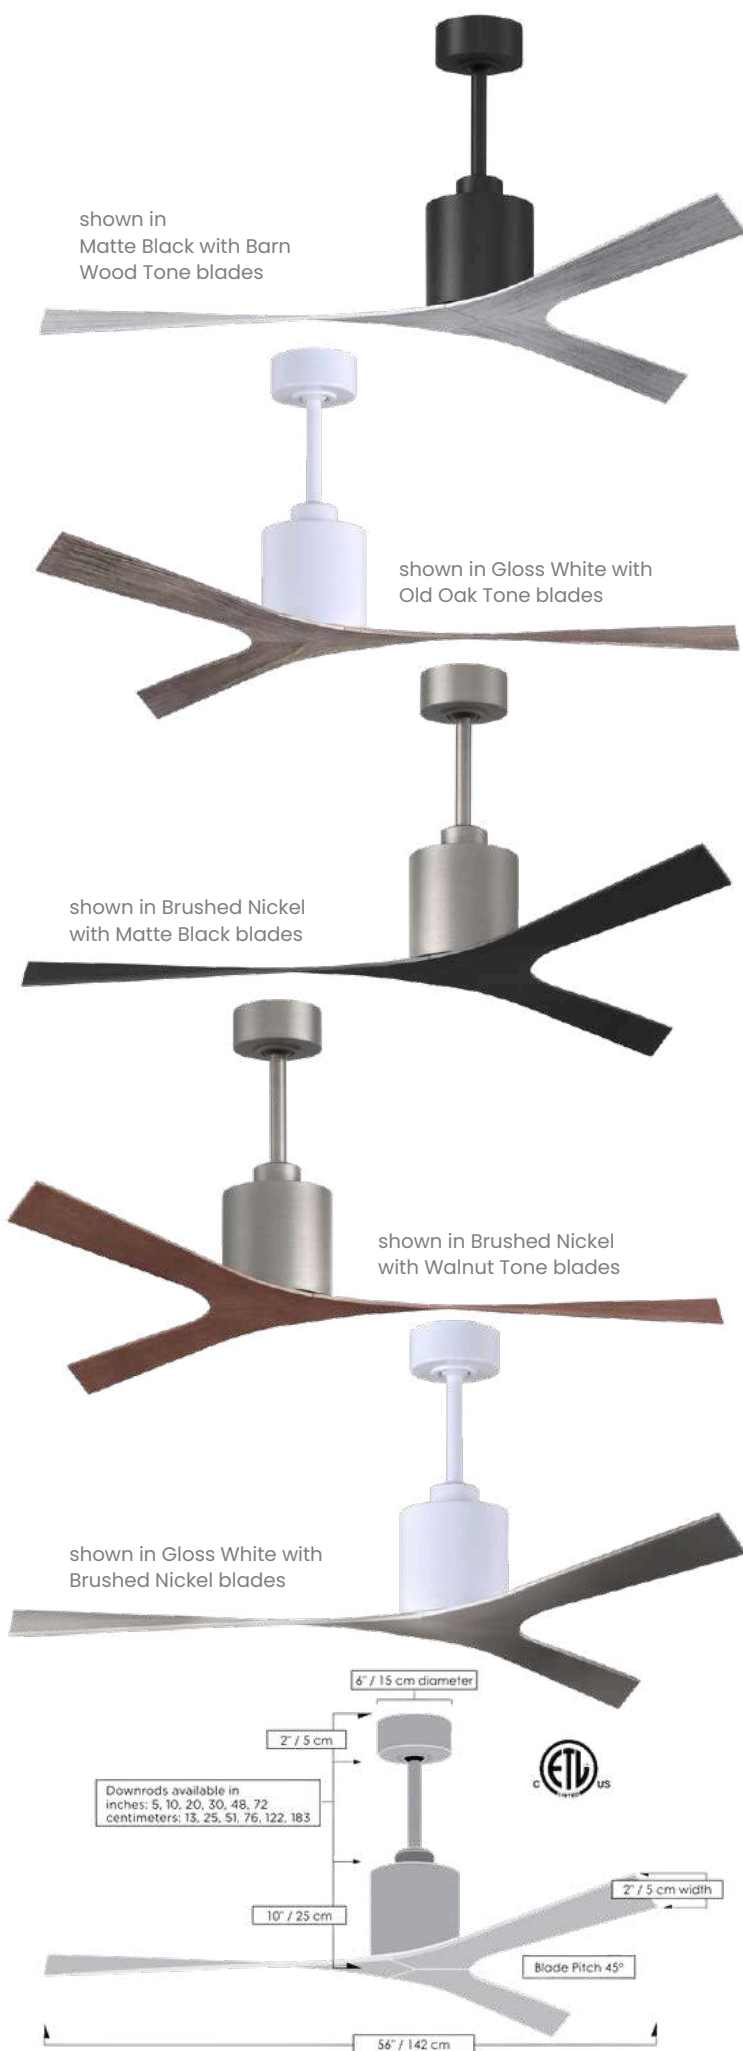

MOLLY

FINISH AND BLADE OPTIONS

SKU#	MK-XXX-XXX (Model+Finish+Blade)	
Standard Finishes	Brushed Nickel	BN
	Gloss White	MH
	Matte Black	BK
Blade Finishes	Barn Wood Tone	BW
	Brushed Nickel	BN
	Gloss White	WH
	Gray Ash Tone	GA
	Matte Black	BK
	Old Oak Tone	OO
	Walnut Tone	WA

TECHNICAL SPECS

Fan Diameter	56 inches / 142 cm
Blade Material	ABS
Overall Drop	12 inches / 30 cm + downrod length
Fan Weight	17 lbs
Voltage	110 (Please contact us for 220V)
Motor Type	DC
Downrods Lengths <i>Field cuttable, non-threaded</i>	inches: 5, 10, 18, 20, 24, 30, 36, 48, 60, 72 centimeters: 13, 25, 46, 51, 76, 91, 122, 152, 183
Downrod Diameter	1 inch
Environment	Wet locations for all finishes All weather blade system. Neither coastal, saltwater nor chlorine compatible
Ambience	Silent
Safety Certification	ETL / CETL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

RPM (Low / High)	49 / 116
CFM (Low / High)	1556 / 3530
Watts (High)	29.96
CFM/Watt (High)	126
Blade Pitch	45°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm
Vaulted ceiling canopy for up to 30°

Black 6-speed RF remote control with reverse



White wireless Decora-style, 6-speed, wall control with reverse




ACCESSORY

60° cathedral ceiling canopy

NOTE: Only compatible with included controllers.

Blade Options

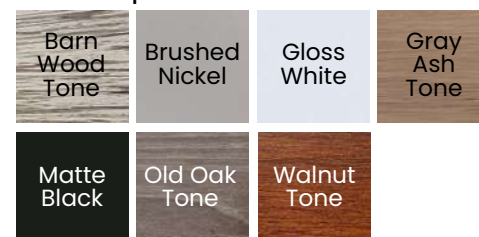

shown in Matte Black
with 60" Barn Wood blades

Mollywood

Designed by Chicago architect Stephen Katz in 2018, the Mollywood ceiling fan combines modern organic geometry with outstanding performance and function. The blade shape was developed using advanced computer software which allowed the design to achieve a complex form. The result is a clean, natural and contemporary look perfect for any room or décor. Available in matte black, matte white, or textured bronze finishes with either barn wood, matte black, matte white or walnut tone solid wood blade options. Mollywood will complement a variety of design styles while also providing a fresh and unique, modern statement. Constructed of cast aluminum and heavy stamped steel, Mollywood carries a limited lifetime warranty.

Product Features



DC
Motor



Damp
Location



Silent



Remote
Control



Wall
Control



30° Slant
Ceiling Canopy



60° Cathedral
Ceiling Canopy

shown in Matte Black
with 52" Matte Black blades



shown in Matte White
with 42" Matte White blades



shown in Textured Bronze
with 60" Walnut blades



shown in Brushed Brass with
52" Barn Wood blades



6" / 15cm Diameter

2" / 5cm

Downrods available in
inches: 5, 10, 20, 30, 48 or 72
centimeters: 13, 25, 51, 76, 122, or 183

Blade Pitch 20°

3.15" / 8cm Width

10" / 25cm

42", 52" or 60" / 107 cm, 132 cm or 152 cm

MOLLYWOOD

FINISH AND BLADE OPTIONS

SKU#	MW-XXXX-XXX-XX (Model+Finish+Blade+Diameter)	
Standard Finishes	Brushed Brass Matte Black Matte White Textured Bronze	BRBR BK MWH TB
Blade Finishes	Barn Wood Tone Matte Black Matte White Walnut Tone	BW BK MWH WA
Fan Diameter	42 inches / 107 cm 52 inches / 132 cm 60 inches / 152 cm	42 52 60

TECHNICAL SPECS

Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152
Blade Material	CNC Cut Solid Wood
Overall Drop	12 inches / 30 cm + downrod length
Fan Weight	18 lbs
Downrods Lengths Field cuttable. Non- threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Voltage	110 (Contact us for 220 conversion)
Motor Type	DC
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible
Ambience	Silent
Safety Certification	ETL / CETL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Diameter	42 inch / 107cm	52 inch / 132cm	60 inch / 152cm
RPM (Low / High)	49 / 216	50 / 146	50 / 115
CFM (Low / High)	1077 / 4864	1774 / 5504	2504 / 5882
Watts (High)	31.68	31.60	34.35
CFM/Watt (High)	84	88	83
Blade Pitch	45°	45°	45°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 30°

Black 6-speed
RF remote
control with
reverse



White wireless
Decora-style,
6-speed, wall
control with
reverse




ACCESSORY

60° cathedral ceiling canopy

NOTE: Only compatible with included controllers.

Blade Options



shown in Matte White
with 52" Walnut blades



Nan



Designed by Chicago architect Stephen Katz, the Nan ceiling fan is a contemporary take on traditional fan design with superior performance and functionality. The Nan fan feels at home in any room or setting from casual to formal and everything in between. This timeless ceiling fan works in residential environments, restaurants, hospitality or even office settings. The Nan fan has the perfect amount of design presence for any size room or season. The fully adjustable fan motor speeds makes moving the right amount of air simple and easy. The Nan fan will feel like a natural part of the room and enhance any space with a fresh breeze. Also available is the larger Nan XL for larger spaces.

Product Features



DC
Motor



Damp
Location



Silent



Remote
Control



Wall
Control



30° Slant
Ceiling Canopy



60° Cathedral
Ceiling Canopy



NAN

FINISH AND BLADE OPTIONS

SKU#	NK-XXX-XXX-XX (Model+Finish+Blade+Diameter)	
Standard Finishes	Brushed Brass	BRBR
	Matte Black	BK
	Matte White	MWH
	Textured Bronze	TB
Blade Finish	Barn Wood	BW
	Gray Ash	GA
	Light Maple	LM
	Matte Black	BK
	Matte White	MWH
	Walnut	WA
Fan Diameter	42 inches / 107 cm	42
	52 inches / 132 cm	52
	60 inches / 152 cm	60

TECHNICAL SPECS

Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152
Blade Material	CNC Cut Solid Wood
Overall Drop	12 inches / 30 cm + downrod length
Fan Weight	18 lbs
Downrods Lengths <i>Field cuttable. Non-threaded</i>	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Voltage	110 (Contact us for 220 conversion)
Motor Type	DC
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.
Ambience	Silent
Safety Certification	ETL / CETL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Diameter	42 inch / 107 cm	52 inch / 132 cm	60 inch / 152 cm
RPM (Low / High)	53 / 235	51 / 202	51 / 152
CFM (Low / High)	941 / 5101	1692 / 7389	2454 / 8251
Watts (High)	20.37	32.61	32.58
CFM/Watt (High)	213	220	256
Blade Pitch	15°	15°	15°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 30°

Black 6-speed RF
remote control
with reverse





White wireless
Decora-style,
6-speed, wall
control



ACCESSORY 60" cathedral ceiling canopy

NOTE: Only compatible with included controllers.

Blade Options



shown in Matte Black
with 90" Matte White blades



Nan XL

Designed by Chicago architect Stephen Katz, the Nan XL ceiling fan is a revolutionary take on ceiling fans, incorporating traditional design with superior performance and functionality to meet the aesthetic needs and challenges of any space. The Nan XL fan feels at home in any setting from casual to commercial and everything in between. This timeless ceiling fan works in residential environments, restaurants, hospitality or even office settings. The Nan XL fan has the perfect amount of design presence for any size room or season. The fully adjustable fan motor speeds makes moving the right amount of air simple and easy. The Nan XL fan will feel like a natural part of the room and enhance any space with a fresh breeze. Also available is the standard Nan fan with smaller diameter options: 42", 52" and 60".

Product Features



DC
Motor



Damp
Location



Silent



Remote
Control



Wall
Control




30° Slant
Ceiling Canopy



60° Cathedral
Ceiling Canopy



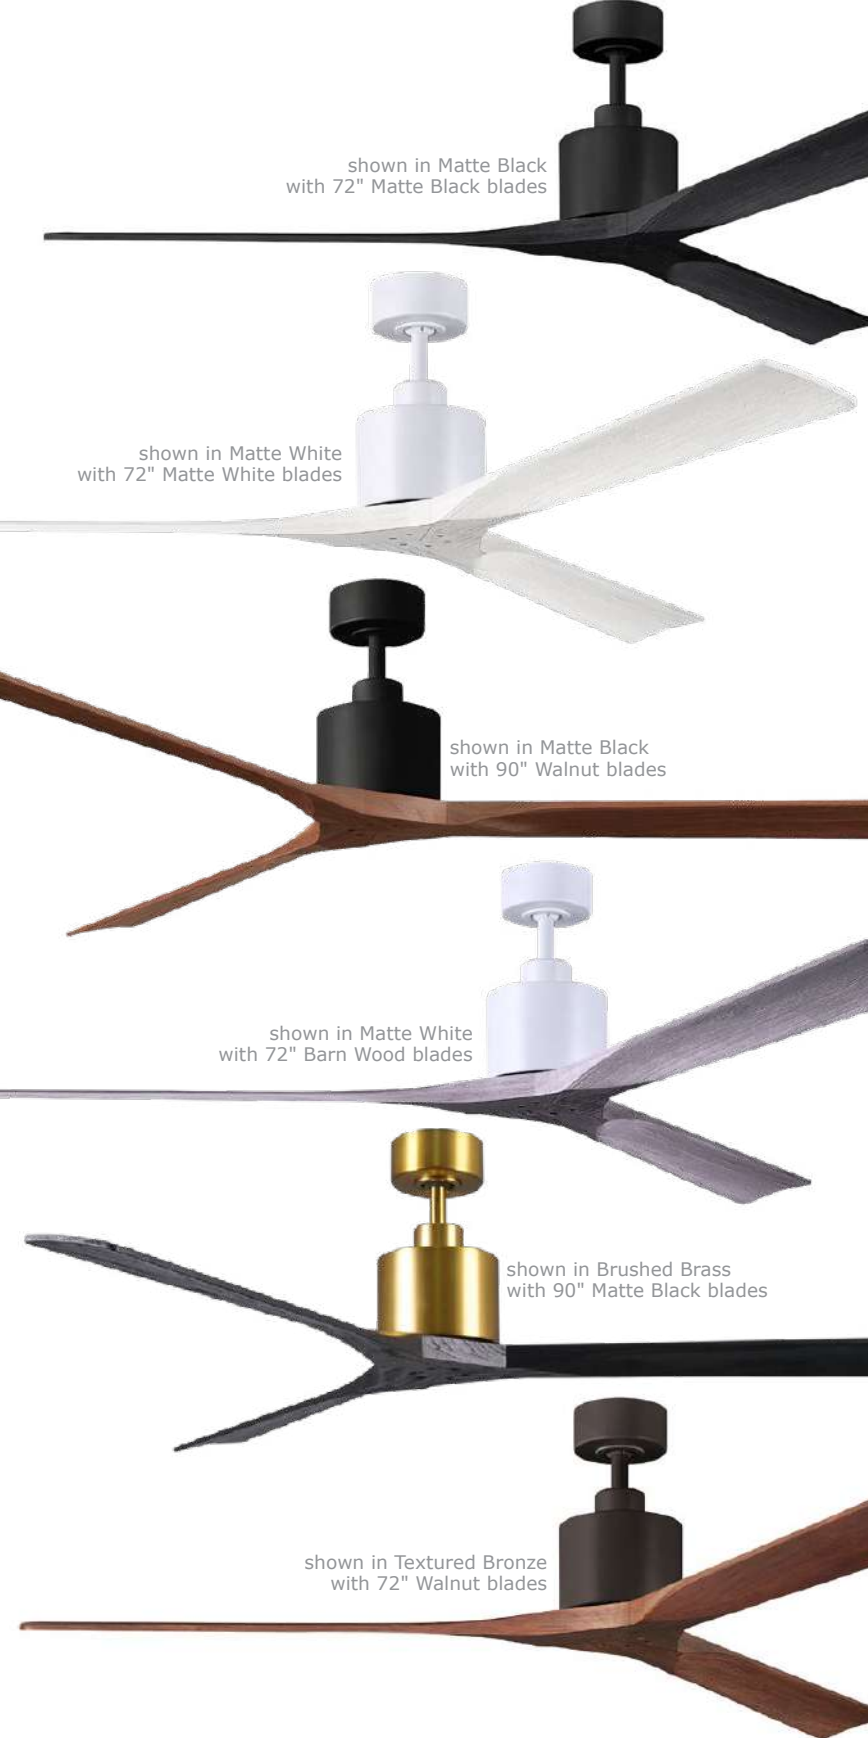

NAN XL

FINISH AND BLADE OPTIONS

SKU#	NKXL-XXX-XXX-XX (Model+Finish+Blade+Diameter)	
Standard Finishes	Brushed Brass	BRBR
	Black	BK
	Matte White	MWH
	Textured Bronze	TB
Blade Finish	Barn Wood	BW
	Gray Ash	GA
	Light Maple	LM
	Matte Black	BK
	Matte White	MWH
	Walnut	WA
Fan Diameter	72 inches / 183 cm	72
	90 inches / 229 cm	90

TECHNICAL SPECS

Fan Diameter	inches: 72 or 90 centimeters: 183 or 229
Blade Material	CNC Cut Solid Wood
Overall Drop	12 inches / 30 cm + downrod length
Fan Weight	19 lbs
Downrods Lengths <i>Field cuttable. Non-threaded</i>	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Voltage	110 (Contact us for 220 conversion)
Motor Type	DC
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.
Ambience	Silent
Safety Certification	ETL / CETL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Diameter	72 inch / 183 cm	90 inch / 229 cm
RPM (Low / High)	51 / 106	28 / 143
CFM (Low / High)	4213 / 9232	4257 / 13,687
Watts (High)	32.06	31.59
CFM/Watt (High)	311	456
Blade Pitch	15°	15°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Slant ceiling canopy for up to 30°

Black 6-speed RF remote control with reverse




White wireless Decora-style, 6-speed, wall control




ACCESSORY 60° Cathedral Ceiling Canopy

NOTE: Only compatible with included controllers.

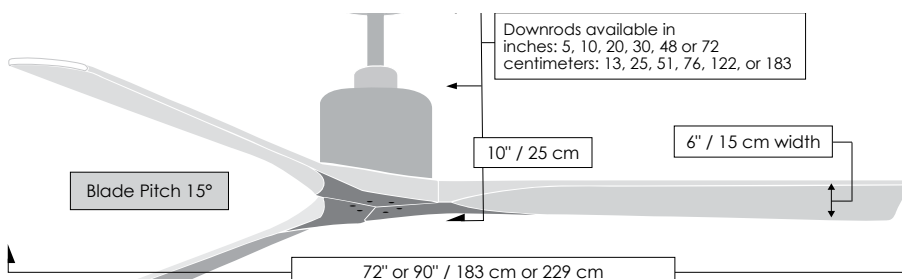

Blade Options

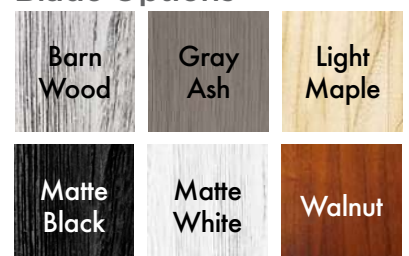



shown in Matte Black
with 52" Walnut blades



Patrícia-3

A complement to any commercial or residential space, the Patrícia-3 seamlessly combines innovation with simple, refined design. Its elegant aesthetic belies its robust construction. Solid wood walnut, matte black, matte white, or barn wood tone blades revolve around a balanced, cylindrical DC motor housing. Air is circulated efficiently with barely more than a whisper. An eco-conscious LED light kit completes the package, making Patrícia-3 sophisticated, efficient and green. Constructed of cast aluminum and heavy stamped steel, the Patrícia-3 carries a limited lifetime warranty.

Product Features



DC
Motor



Damp
Location



Silent



LED
Lamp



Dimmable
Lamp



Remote
Control




Wall
Control




30° Slant
Ceiling Canopy



60° Cathedral
Ceiling Canopy

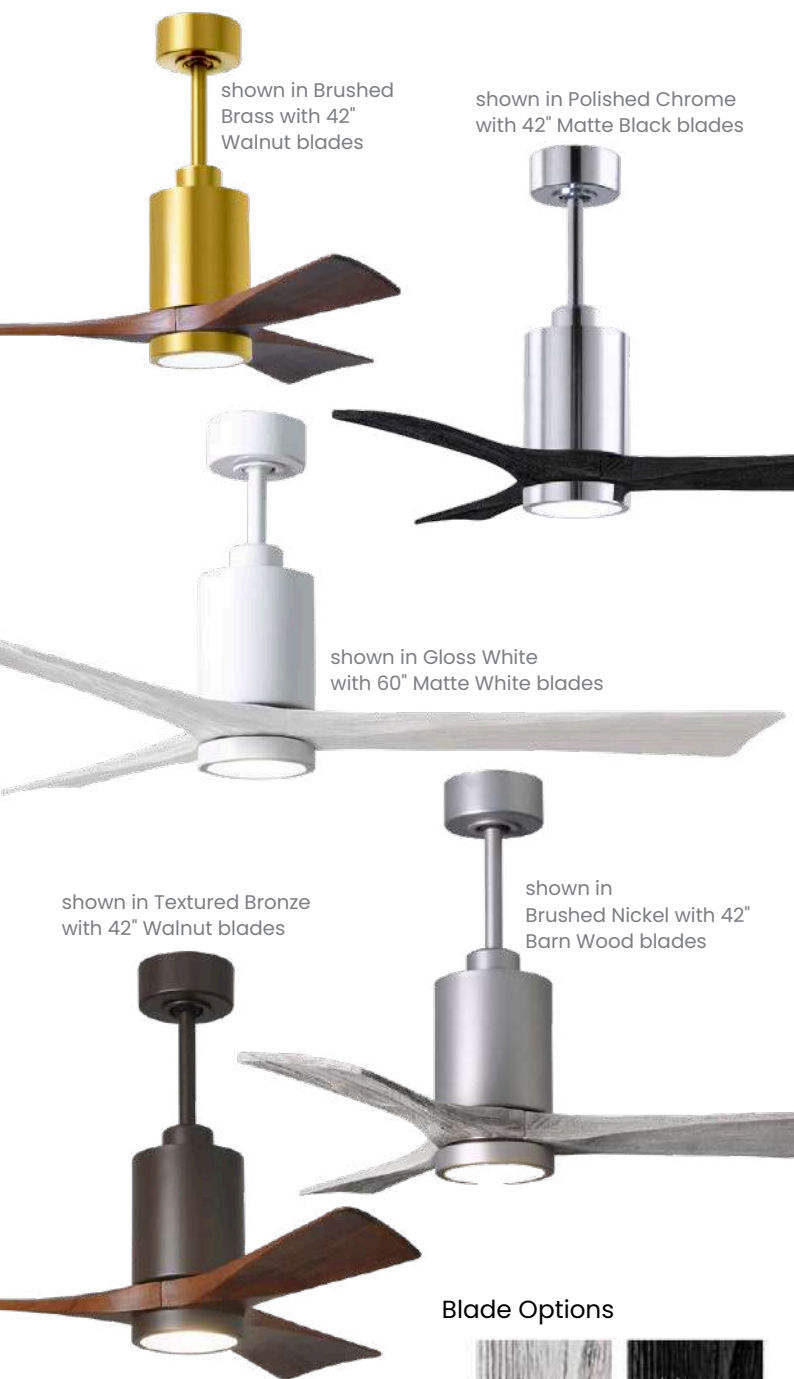

Blade Options

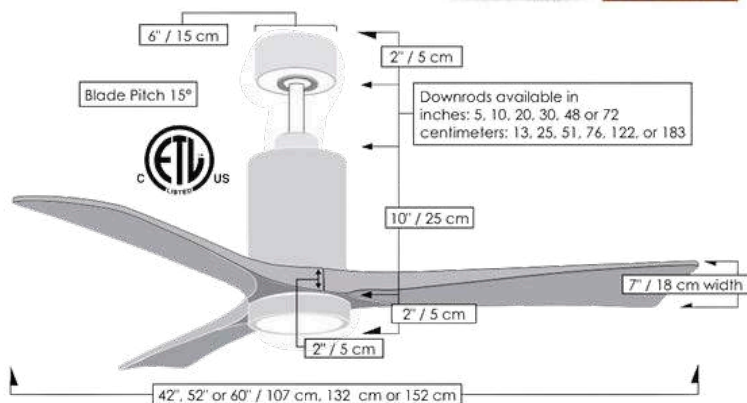

PATRÍCIA-3

FINISH AND BLADE OPTIONS

SKU#	PA3-XXXX-XXX-XX (Model+Finish+Blade+Diameter)	
Standard Finishes	Brushed Brass	BRBR
	Brushed Nickel	BN
	Gloss White	WH
	Matte Black	BK
	Polished Chrome	CR
Blade Finishes	Textured Bronze	TB
	Barn Wood Tone	BW
	Matte Black	BK
	Matte White	MWH
	Walnut Tone	WA
Fan Diameter	42 inches / 107 cm	42
	52 inches / 132 cm	52
	60 inches / 152 cm	60

TECHNICAL SPECS

Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152
Blade Material	CNC Cut Solid Wood
Overall Drop	14 inches / 36 cm + downrod length
Fan Weight	19 lbs
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Voltage	110 or 220
Motor Type	DC
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible
Ambience	Silent
Safety Certification	ETL / CETL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Diameter	42 inch / 107cm	52 inch / 132cm	60 inch / 152cm
RPM (Low / High)	52 / 232	51 / 219	51 / 156
CFM (Low / High)	860 / 4286	1283 / 6077	2113 / 6833
Watts (High)	16.60	32.03	31.72
CFM/Watt (High)	211	182	219
Blade Pitch	15°	15°	15°

LIGHT KIT PHOTOMETRICS

Lamping (Replaceable)	Integrated LED
Remote Dimmable	YES
Delivered Temperature in K	5CCT (*see Delivered Lumens)
CRI	90
Watts	22
Hours	30,000

*Delivered Lumens

2700K	3000K	4000K	5000K	6500K
1063	1088	1234	1221	1107

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm
Vaulted ceiling canopy for up to 30°
Light cover

Black 6-speed RF remote control with reverse



White wireless Decora-style, 6-speed, wall control with reverse



ACCESSORY 60° cathedral ceiling canopy

NOTE: Only compatible with included controllers.

shown in Brushed Nickel
with 52" Barn Wood blades



Patrícia-5



A complement to any commercial or residential space, the Patrícia-5 seamlessly combines innovation with simple, refined design. Its elegant aesthetic belies its robust construction. Solid wood walnut, matte black, matte white, or barn wood tone blades revolve around a balanced, cylindrical DC motor housing. Air is circulated efficiently with barely more than a whisper. An eco-conscious LED light kit completes the package, making Patrícia-5 sophisticated, efficient and green. Constructed of cast aluminum and heavy stamped steel, the Patrícia-5 carries a limited lifetime warranty.

Product Features



DC
Motor



Damp
Location



Silent



LED
Lamp



Dimmable
Lamp



Remote
Control



Wall
Control



30° Slant
Ceiling Canopy



60° Cathedral
Ceiling Canopy



PATRÍCIA-5

FINISH AND BLADE OPTIONS

SKU#	PA5-XXXX-XXX-XX (Model+Finish+Blade+Diameter)	
Standard Finishes	Brushed Brass	BRBR
	Brushed Nickel	BN
	Gloss White	WH
	Matte Black	BK
	Polished Chrome	CR
Blade Finishes	Textured Bronze	TB
	Barn Wood Tone	BW
	Matte Black	BK
	Matte White	MWH
	Walnut Tone	WA
Fan Diameter	42 inches / 107 cm	42
	52 inches / 132 cm	52
	60 inches / 152 cm	60

TECHNICAL SPECS

Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152
Blade Material	CNC Cut Solid Wood
Overall Drop	14 inches / 36 cm + downrod length
Fan Weight	19 lbs
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 18, 20, 24 30, 36, 48, 60, 72 centimeters: 13, 25, 46, 51, 61 76, 91, 122, 152, 183
Downrod Diameter	1 inch
Voltage	110 or 220
Motor Type	DC
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible
Ambience	Silent
Safety Certification	ETL / CETL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Diameter	42 inch / 107cm	52 inch / 132cm	60 inch / 152cm
RPM (Low / High)	53 / 221	51 / 186	51 / 87
CFM (Low / High)	917 / 4386	1398 / 5524	3247 / 5547
Watts (High)	30.47	31.80	31.64
CFM/Watt (High)	137	170	194
Blade Pitch	15°	15°	15°

LIGHT KIT PHOTOMETRICS

Lamping (Replaceable)	Integrated LED
Remote Dimmable	YES
Delivered Temperature in K	5CCT (*see Delivered Lumens)
CRI	90
Watts	22
Hours	30,000

Delivered Lumens

2700K	3000K	4000K	5000K	6500K
1063	1088	1234	1221	1107

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm
Vaulted ceiling canopy for up to 30°
Light cover

Black 6-speed RF remote control with reverse



White wireless Decora-style, 6-speed, wall control with reverse



ACCESSORY 60° cathedral ceiling canopy

NOTE: Only compatible with included controllers.

shown in Matte Black
with 52" Barn Wood blades



Super Janet



The Super Janet's remarkable design and solid construction in cast aluminum and heavy stamped steel make it the heroine in any commercial or residential space. Moving air with barely a whisper, its efficient DC motor turns solid wood blades in walnut, matte black, matte white, or barn wood tones. An eco-conscious LED light kit with light cover completes the package. Sophisticated, efficient and green, Super Janet carries a limited lifetime warranty.

Product Features



DC
Motor



Damp
Location



Silent



LED
Lamp



Dimmable
Lamp



Remote
Control



Wall
Control




30° Slant
Ceiling Canopy



60° Cathedral
Ceiling Canopy



Unipack
Shipping*

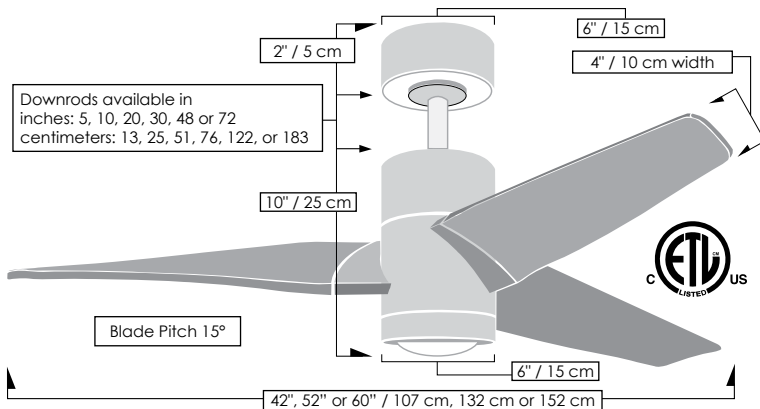

Blade Options



SUPER JANET

FINISH AND BLADE OPTIONS

SKU#	SJ-XX-XXX-XX (Model+Finish+Blade+Diameter)	
Standard Finishes	Brushed Nickel	BN
	Gloss White	WH
	Matte Black	BK
	Textured Bronze	TB
Blade Finishes	Barn Wood Tone	BW
	Matte Black	BK
	Matte White	MWH
	Walnut Tone	WN
Fan Diameter	42 inches / 107 cm	42
	52 inches / 132 cm	52
	60 inches / 152 cm	60

TECHNICAL SPECS

Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152
Blade Material	CNC Cut Solid Wood
Overall Drop	12 inches / 30 cm + downrod length
Fan Weight	17 lbs
Downrods Lengths <i>Field cuttable. Non-threaded</i>	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Voltage	110 (Contact us for 220 conversion)
Motor Type	DC
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.
Ambience	Silent
Safety Certification	ETL / CETL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Diameter	42 inch / 107 cm*	52 inch / 132 cm*	60 inch / 152 cm
RPM (Low /High)	50 / 242	50 / 184	50 / 150
CFM (Low /High)	915 / 4530	1571 / 5962	2293 / 6495
Watts (High)	23.62	32.99	33.32
CFM/Watt (High)	173	180	205
Blade Pitch	15°	15°	15°

LIGHT KIT PHOTOMETRICS

Lamping (Replaceable)	Integrated LED
Remote Dimmable	Yes
Delivered Temperature in K	2776
Delivered Lumens	419
CRI	94
Watts	18
Hours	50,000
Light kit longevity if used 6 Hours/Day: 22.8 Years	

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm	
Vaulted ceiling canopy for up to 30°	
Black 6-speed RF remote control with reverse	White wireless Decora-style, 6-speed, wall control

ACCESSORY 60° cathedral ceiling canopy

NOTE: Only compatible with included controllers.

*Unpack Shipping for 42" and 52" in diameters only.

shown in Polished Chrome
with wood blades



Ar Ruthiane



The Ar Ruthiane's unique hourglass support arms grasp bullet-shaped motor housings which rotate 360° about its teardrop center. The fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Ar Ruthiane carries a limited lifetime warranty.

Product Features



American
Labor



Hand
Made



AC
Motor



360°
Rotation



Safety Cage
Compatible



Damp
Location



Soothing
White Noise



Wall
Control



29° Slant
Ceiling Canopy



Unipack
Shipping



AR RUTHIANE

FINISH AND BLADE OPTIONS

SKU#	AR-XXXXXX-XXX (Model+Finish+Blade)	
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN
Special Order Finishes	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Copper Polished Chrome Damp Brushed Nickel Damp Gloss White Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira	BRBR BRCP PB CR CP CRDAMP BNDAMP WH LTBLUE LTPURPLE BKN GREEN GOLD RED BLUE
Fan Blade	Solid Mahogany Wood Blade Metal Blade	WD MTL

TECHNICAL SPECS

Fan Weight	21 lbs
Voltage	110 or 220
Motor Type	AC
Rotation	Yes
Downrods Lengths <i>Field cuttable. Non-threaded</i>	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	.75 inch
Overall Drop	12 inches / 30 cm + downrod length
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.
Ambience	Soothing White Noise
Safety Certification	UL / CUL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Head Options	Solid Mahogany Wood	Metal with Guard
Fan Diameter	48 inches / 122 cm	46 inches / 117 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	723 / 1308	591 / 1075
CFM (Low / High)	2644 / 4724	1215 / 2371
Watts (High)	96.94	103.53
CFM/Watt (High)	48.73	22.90
Blade Pitch	19°	31°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm
Flat ceiling canopy
Decora-style, 3-speed wall control in white
OPTIONAL EQUIPMENT
29° vaulted ceiling mount and canopy



Special Order Finishes

Agua Marinha	Ametista	Black Nickel	Esmeralda	Ouro	Rubi	Safira	
Brushed Brass	Polished Brass	Brushed Copper	Polished Copper	Polished Chrome	Polished Chrome Damp	Brushed Nickel Damp	Gloss White

Standard Finishes

Matte Black	Bronzette (Powdercoat)	Brushed Nickel
-------------	------------------------	----------------

Spinning Bianca Direcionais in
Polished Chrome with wood blades shown



Bianca Direcional



Unique and versatile, the fan head of the Bianca Direcional ceiling fan can be infinitely positioned in a 180-degree arc, forward and reverse, to provide maximum, directional airflow. The Bianca can be hung in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any room. Constructed of cast aluminum, heavy spun and stamped steel, the Bianca Direcional carries a limited lifetime warranty.

Product Features



American
Labor



Hand
Made



AC
Motor



180°
Adjustable



Safety Cage
Compatible



Damp
Location



Soothing
White Noise



Wall
Control



Unipack
Shipping



BIANCA DIRECIONAL

FINISH AND BLADE OPTIONS

SKU#	BD-XXXXXX-XX (Model+Finish+Blade)	
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Copper Polished Chrome Damp Brushed Nickel Damp Gloss White Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira	BRBR BRCP PB CR CP CRDAMP BNDAMP WH LTBLUE LTPURPLE BKN GREEN GOLD RED BLUE
Fan Blade	Solid Mahogany Wood Blade Metal Blade	WD MTL

TECHNICAL SPECS

Fan Weight	7 lbs	
Voltage	110 or 220	
Motor Type	AC	
Oscillation	No	
Downrods Lengths <i>Field cuttable. Non-threaded</i>	inches: 5, 10, 20, 30 centimeters: 13, 25, 51, 76	
Downrod Diameter	.75 inch	
Overall Drop	Metal Blades:	13 inches / 33 cm + downrod length
	Wood Blades:	16 inches / 41 cm + downrod length
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Soothing White Noise	
Safety Certification	UL / CUL	
Warranty	Limited Lifetime	

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Head Options	Solid Mahogany Wood	Metal with Guard
Fan Diameter	16 inches / 41 cm	13 inches / 33 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	926 / 1280	615 / 1149
CFM (Low / High)	1568 / 2274	814 / 1199
Watts (High)	47.46	49.00
CFM/Watt (High)	47.91	24.47
Blade Pitch	19°	31°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm
Flat ceiling canopy (Not compatible with vaulted ceiling canopy)
Decora-style, 3-speed wall control in white



Special Order Finishes

Agua Marinha	Ametista	Black Nickel	Esmeralda	Ouro	Rubi	Safira
Brushed Brass	Polished Brass	Brushed Copper	Polished Copper	Polished Chrome	Polished Chrome Damp	Brushed Nickel Damp
Gloss White						

Standard Finishes

Matte Black	Bronzette (Powdercoat)	Brushed Nickel
-------------	---------------------------	----------------

shown in Black
with Wood blade



Brisa 2000



Like satellites orbiting a planet, the Brisa's select mahogany blade head and lunar counterweight gently revolve 360° about its spherical gear housing. The fan head can be infinitely positioned in a 180-degree arc for optimum air movement; the greater the angle of the motor to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Brisa carries a limited lifetime warranty.

Product Features



shown in
Gloss White with
metal blades in safety cage



shown in
Polished Copper
with wood blades




shown in Brushed
Nickel with metal blades in
safety cage



shown in
Bronzette with
wood blades



shown in
Black with metal
blades in safety cage

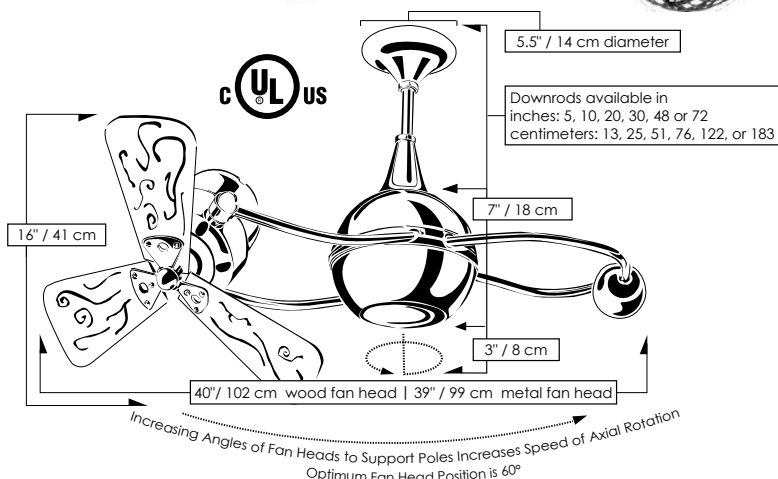

BRISA 2000

FINISH AND BLADE OPTIONS

SKU#	B2K-XXXXXX-XXX (Model+Finish+Blade)	
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Copper Polished Chrome Damp Brushed Nickel Damp Gloss White Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira	BRBR BRCP PB CR CP CRDAMP BNDAMP WH LTBLUE LTPURPLE BKN GREEN GOLD RED BLUE
Fan Blade	Solid Mahogany Wood Blade Metal Blade	WD MTL


TECHNICAL SPECS

Fan Weight	21 lbs
Voltage	110 or 220
Motor Type	AC
Rotation	Yes
Downrods Lengths <i>Field cuttable. Non-threaded</i>	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	.75 inch
Overall Drop	10 inches / 25 cm + downrod length
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.
Ambience	Soothing White Noise
Safety Certification	UL / CUL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Head Options	Solid Mahogany Wood*	Metal with Guard
Fan Diameter	40 inches / 102 cm	39 inches / 99 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	866 / 1336	790 / 1205
CFM (Low / High)	1602 / 2376	790 / 1265
Watts (High)	52.44	55.15
CFM/Watt (High)	45.31	22.94
Blade Pitch	19°	31°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm	
Flat ceiling canopy	
Decora-style, 3-speed wall control in white	
OPTIONAL EQUIPMENT	
29° vaulted ceiling mount and canopy	
NOTE: *Unipack Shipping for Wood Blades only	

NOTE: *Unipack Shipping for Wood Blades only

Special Order Finishes

Agua Marinha	Ametista	Black Nickel	Esmeralda	Ouro	Rubi	Safira
Brushed Brass	Polished Brass	Brushed Copper	Polished Copper	Polished Chrome	Polished Chrome Damp	Brushed Nickel Damp
Gloss White						

Standard Finishes

Matte Black	Bronzette (Powdercoat)	Brushed Nickel
-------------	------------------------	----------------

shown in Brushed Nickel



Bruna Parede

The Bruna Parede is reminiscent of the wall fans of the early 20th century. The fan head of the Bruna Parede wall mounted fan can be infinitely positioned vertically and horizontally across 180-degree arcs to provide maximum directional airflow. It can be mounted in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any space. Constructed of cast aluminum, heavy spun and stamped steel, the Bruna Parede carries a limited lifetime warranty.

Product Features



American Labor



Hand Made



AC Motor



180° Adjustable



Safety Cage Compatible



Damp Location




Soothing White Noise



Wall Control



Unipack Shipping

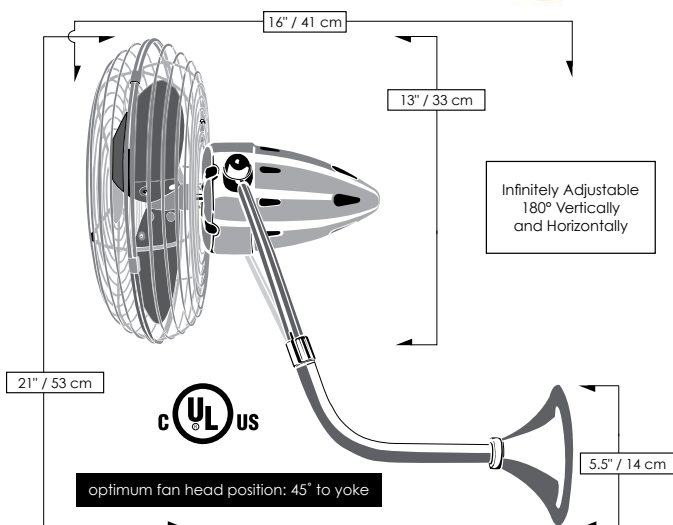

BRUNA PAREDE

FINISH AND BLADE OPTIONS

SKU#	BP-XXXXXX (Model+Finish)	
Standard Finishes	Black	BK
	Bronzette	BZZT
	Brushed Nickel	BN
Special Order	Brushed Brass	BRBR
	Brushed Copper	BRCP
	Polished Brass	PB
	Polished Chrome	CR
	Polished Copper	CP
	Polished Chrome Damp	CRDAMP
	Brushed Nickel Damp	BNDAMP
	Gloss White	WH
	Agua Marinha	LTBLUE
	Ametista	LTPURPLE
	Black Nickel	BKN
	Esmeralda	GREEN
	Ouro	GOLD
	Rubi	RED
	Safira	BLUE

TECHNICAL SPECS

Fan Weight	8 lbs
Blade Material	Metal
Voltage	110 or 220
Motor Type	AC
Oscillation	No
Fan Diameter	13 inches / 33 cm
Fan Height	21 inches / 51 cm
Fan Projection	16 inches / 41 cm
Recommended Mounting Height	Approximately 24 inches / 61 cm from ceiling
Fan Guard	Safety Cage
Environment	Damp location with powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.
Ambience	Soothing White Noise
Safety Certification	UL / CUL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

RPM (Low / High)	1021 / 1418
CFM (Low / High)	839 / 1181
Watts (High)	49.00
CFM/Watt (High)	24.01
Blade Pitch	31°

STANDARD EQUIPMENT

Safety cage	
Side-mounted wall junction box	
Decora-style, 3-speed wall control in white	

Special Order Finishes

Agua Marinha	Ametista	Black Nickel	Esmeralda	Ouro	Rubi	Safira
Brushed Brass	Polished Brass	Brushed Copper	Polished Copper	Polished Chrome	Polished Chrome Damp	Brushed Nickel Damp
Gloss White						

Standard Finishes

Matte Black	Bronzette (Powdercoat)	Brushed Nickel
-------------	------------------------	----------------

shown in Polished Chrome
with metal blades and
decorative cage



Duplo-Dinamico



Few designs can match the timeless and sophisticated aesthetic of the Duplo-Dinamico 360° rotational fan. Other manufacturers have tried to reproduce this unique design, though all have proven to be of lesser quality and durability. The fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Duplo carries a limited lifetime warranty.

Product Features



American
Labor



Hand
Made



AC
Motor



360°
Rotation



Safety Cage
Compatible



Damp
Location



Soothing
White Noise




Wall
Control



29° Slant
Ceiling Canopy



Unipack
Shipping*

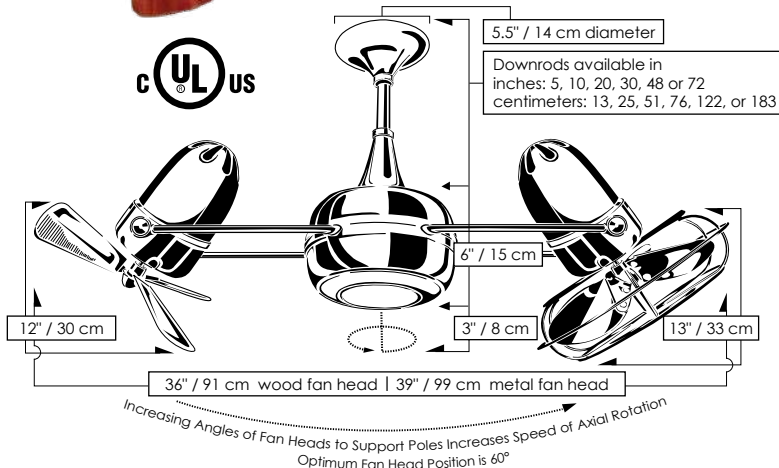

DUPLO-DINAMICO

FINISH AND BLADE OPTIONS

SKU#	DD-XXXXXX-XXX (Model+Finish+Blade)	
Standard Finishes	Black	BK
	Bronzette	BZZT
	Brushed Nickel	BN
Special Order	Brushed Brass	BRBR
	Brushed Copper	BRCP
	Polished Brass	PB
	Polished Chrome	CR
	Polished Copper	CP
	Polished Chrome Damp	CRDAMP
	Brushed Nickel Damp	BNDAMP
	Gloss White	WH
	Agua Marinha	LTBLUE
	Ametista	LTPURPLE
	Black Nickel	BKN
	Esmeralda	GREEN
	Ouro	GOLD
	Rubi	RED
	Safira	BLUE
Fan Blade	Solid Mahogany	WD
	Wood Blade	MTL
	Metal Blade	


TECHNICAL SPECS

Fan Weight	21 lbs
Voltage	110 or 220
Motor Type	AC
Rotation	Yes
Downrods Lengths <i>Field cuttable. Non-threaded</i>	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	.75 inch
Overall Drop	9 inches / 23 cm + downrod length
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.
Ambience	Soothing White Noise
Safety Certification	UL / CUL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Head Options	Solid Mahogany Wood*	Metal with Guard
Fan Diameter	36 inches / 91 cm	39 inches / 99 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	1274 / 1534	598 / 1109
CFM (Low / High)	2673 / 3210	1240 / 2274
Watts (High)	74.06	103.35
CFM/Watt (High)	43.34	22.00
Blade Pitch	19°	31°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm	
Flat ceiling canopy	
Decora-style, 3-speed wall control in white	
OPTIONAL EQUIPMENT	
29° vaulted ceiling mount and canopy	

NOTE: *Unpack Shipping for Wood Blades only

Special Order Finishes

Agua Marinha	Ametista	Black Nickel	Esmeralda	Ouro	Rubi	Safira
Brushed Brass	Polished Brass	Brushed Copper	Polished Copper	Polished Chrome	Polished Chrome Damp	Brushed Nickel Damp
Gloss White						

Standard Finishes

Matte Black	Bronzette (Powdercoat)	Brushed Nickel
-------------	------------------------	----------------

shown in Black with metal blades
and decorative cage



Italo Ventania



The Italo Ventania is the largest 360° rotational fan in the Matthews Fan Co collection. Its vortex sculpted arms grasp also remarkable, side-mounted fan heads in gentle, equatorial rotation. The fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angle of the motor to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Ar Ruthiane carries a limited lifetime warranty.

Product Features



American
Labor



Hand
Made



AC
Motor



360°
Rotation



Safety Cage
Compatible



Damp
Location



Soothing
White Noise



Wall
Control



29° Slant
Ceiling Canopy



Unipack
Shipping

ITALO VENTANIA

FINISH AND BLADE OPTIONS

SKU#	IV-XXXXXX-XXX (Model+Finish+Blade)	
Standard Finishes	Black	BK
	Bronzette	BZZT
Special Order	Brushed Nickel	BN
	Brushed Brass	BRBR
	Brushed Copper	BRCP
	Polished Brass	PB
	Polished Chrome	CR
	Polished Copper	CP
	Polished Chrome Damp	CRDAMP
	Brushed Nickel Damp	BNDAMP
	Gloss White	WH
	Agua Marinha	LTBLUE
	Ametista	LTPURPLE
	Black Nickel	BKN
	Esmeralda	GREEN
	Ouro	GOLD
	Rubi	RED
	Safira	BLUE
Fan Blade	Solid Mahogany	WD MTL
	Wood Blade	
	Metal Blade	


TECHNICAL SPECS

Fan Weight	24 lbs
Voltage	110 or 220
Motor Type	AC
Rotation	Yes
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	.75 inch
Overall Drop	14 inches / 36 cm + downrod length
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.
Ambience	Soothing White Noise
Safety Certification	UL / CUL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Head Options	Solid Mahogany Wood	Metal with Guard
Fan Diameter	62 inches / 157 cm	60 inches / 152 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	715 / 1209	685 / 1139
CFM (Low / High)	2644 / 4519	1372 / 2278
Watts (High)	91.63	94.76
CFM/Watt (High)	49.32	24.04
Blade Pitch	19°	31°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm	
Flat ceiling canopy	
Decora-style, 3-speed wall control in white	
OPTIONAL EQUIPMENT	
29° vaulted ceiling mount and canopy	

shown in
Brushed Nickel
with metal blades in
decorative cages




shown in
Brushed Copper
with metal blades
in decorative cage



shown in
Bronzette
with metal blades in
decorative cages



shown in
Brushed Nickel
with metal blades
in decorative cages

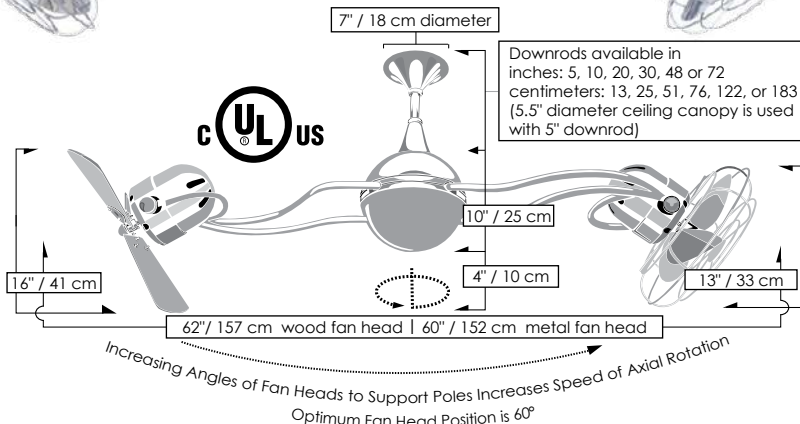

Special Order Finishes

Agua Marinha	Ametista	Black Nickel	Esmeralda	Ouro	Rubi	Safira
Brushed Brass	Polished Brass	Brushed Copper	Polished Copper	Polished Chrome	Polished Chrome Damp	Brushed Nickel Damp
Gloss White						

Standard Finishes

Matte Black	Bronzette (Powdercoat)	Brushed Nickel
-------------	------------------------	----------------

shown in Polished Copper with
metal blades and safety cage



Jarold Direcional



Unique and versatile, the fan head of the Jarold Direcional ceiling fan can be infinitely positioned in a 180-degree arc, forward and reverse, to provide maximum, directional airflow. The Jarold can be hung in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any room. Constructed of cast aluminum, heavy spun and stamped steel, the Jarold Direcional carries a limited lifetime warranty.

Product Features



American
Labor



Hand
Made



AC
Motor



180°
Adjustable



Safety Cage
Compatible



Damp
Location



Soothing
White Noise



Wall
Control



Unipack
Shipping



JAROLD DIRECCIONAL

FINISH AND BLADE OPTIONS

SKU#	JD-XXXXXX-XX (Model+Finish+Blade)	
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Copper Polished Chrome Damp Brushed Nickel Damp Gloss White Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira	BRBR BRCP PB CR CP CRDAMP BNDAMP WH LTBLUE LTPURPLE BKN GREEN GOLD RED BLUE
Fan Blade	Solid Mahogany Wood Blade Metal Blade	WD MTL

TECHNICAL SPECS

Fan Weight	7 lbs	
Voltage	110 or 220	
Motor Type	AC	
Oscillation	No	
Downrods Lengths <i>Field cuttable.</i> <i>Non-threaded</i>	inches: 5, 10, 20, 30 centimeters: 13, 25, 51, 76	
Downrod Diameter	.75 inch	
Overall Drop	Metal Blades:	13 inches / 33 cm + downrod length
	Wood Blades:	16 inches / 41 cm + downrod length
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Soothing White Noise	
Safety Certification	UL / CUL	
Warranty	Limited Lifetime	

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Head Options	Solid Mahogany Wood	Metal with Guard
Fan Diameter	16 inches / 41 cm	13 inches / 33 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	955 / 1318	615 / 1149
CFM (Low / High)	1701 / 2368	800 / 1162
Watts (High)	46.77	48.39
CFM/Watt (High)	50.63	24.01
Blade Pitch	19°	31°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm	
Flat ceiling canopy (Not compatible with vaulted ceiling canopy)	
Decora-style, 3-speed wall control in white	

Special Order Finishes

Agua Marinha	Ametista	Black Nickel	Esmeralda	Ouro	Rubi	Safira
Brushed Brass	Polished Brass	Brushed Copper	Polished Copper	Polished Chrome	Polished Chrome Damp	Brushed Nickel Damp

Standard Finishes

Matte Black	Bronzette (Powdercoat)	Brushed Nickel
-------------	---------------------------	----------------



shown in
Polished Chrome
with metal blades



Michelle Parede



The Michelle Parede is reminiscent of wall fans of the early 20th century. The fan head of the Michelle Parede mounted fan can be infinitely positioned vertically and horizontally across 180-degree arcs to provide maximum directional airflow. It can be mounted in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any space. Constructed of cast aluminum, heavy spun and stamped steel, the Michelle Parede carries a limited lifetime warranty.

Product Features



American
Labor



Hand
Made



AC
Motor



180°
Adjustable



Safety Cage
Compatible



Damp
Location




Soothing
White Noise



Wall
Control



Unipack
Shipping

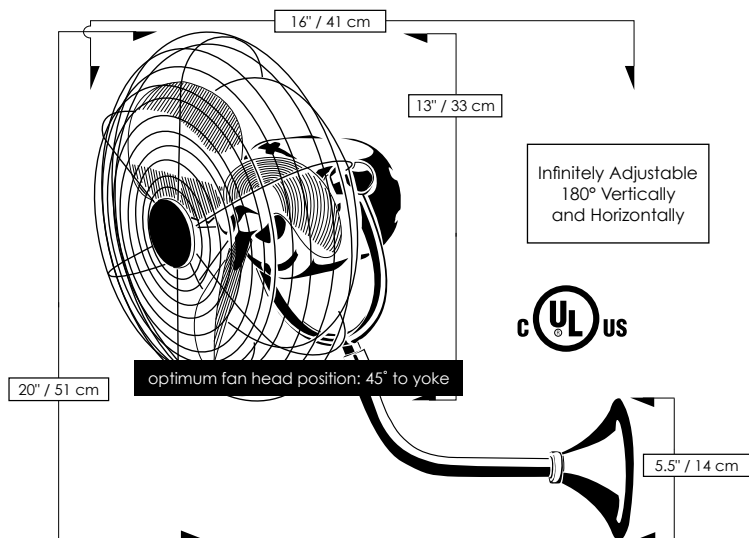

MICHELLE PAREDE

FINISH AND BLADE OPTIONS

SKU#	MP-XXXXXX (Model+Finish)	
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Copper Polished Chrome Damp Brushed Nickel Damp Gloss White Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira	BRBR BRCP PB CR CP CRDAMP BNDAMP WH LTBLUE LTPURPLE BKN GREEN GOLD RED BLUE

TECHNICAL SPECS

Fan Weight	8 lbs
Blade Material	Metal
Voltage	110 or 220
Motor Type	AC
Oscillation	No
Fan Diameter	13 inches / 33 cm
Fan Height	20 inches / 51 cm
Fan Projection	16 inches / 41 cm
Recommended Mounting Height	Approximately 24 inches / 61 cm from ceiling
Fan Guard	Safety Cage
Environment	Damp location with powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.
Ambience	Soothing White Noise
Safety Certification	UL / CUL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

RPM (Low / High)	1020 / 1418
CFM (Low / High)	838 / 1181
Watts (High)	49.00
CFM/Watt (High)	24.01
Blade Pitch	31°

STANDARD EQUIPMENT

Safety cage	
Side-mounted wall junction box	
Decora-style, 3-speed wall control in white	

Special Order Finishes

Agua Marinha	Ametista	Black Nickel	Esmeralda	Ouro	Rubi	Safira
Brushed Brass	Polished Brass	Brushed Copper	Polished Copper	Polished Chrome	Polished Chrome Damp	Brushed Nickel Damp
Gloss White						

Standard Finishes

Matte Black	Bronzette (Powdercoat)	Brushed Nickel
-------------	------------------------	----------------



shown in Bronzette
with metal blades
and safety cage



Vent-Bettina



The Vent-Bettina 360° rotational fan is thoughtfully designed with its arms gently upward curving. The fan offers fluid lines and quiet axial rotation with motor heads which can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Vent-Bettina carries a limited lifetime warranty.

Product Features



shown in Brushed Nickel
with wood blades




shown in Brushed Brass
with metal blades in
decorative cage



shown in Polished Chrome
with metal blades in
decorative cage



shown in Polished Copper
with metal blades and
decorative cage

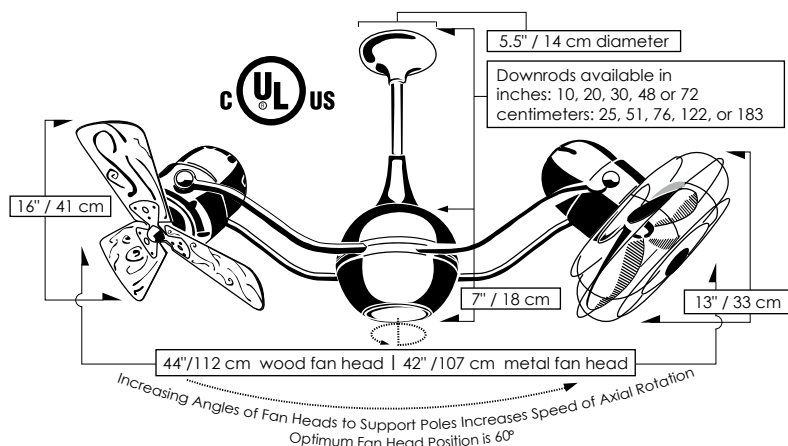

Special Order Finishes

Agua Marinha	Ametista	Black Nickel	Esmeralda	Ouro	Rubi	Safira
Brushed Brass	Polished Brass	Brushed Copper	Polished Copper	Polished Chrome	Polished Chrome Damp	Brushed Nickel Damp
						Gloss White

Standard Finishes

Matte Black	Bronzette (Powdercoat)	Brushed Nickel
----------------	---------------------------	-------------------

VENT-BETTINA

FINISH AND BLADE OPTIONS

SKU#	VB-XXXXXX-XXX (Model+Finish+Blade)	
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Copper Polished Chrome Damp Brushed Nickel Damp Gloss White Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira	BRBR BRCP PB CR CP CRDAMP BNDAMP WH LTBLUE LTPURPLE BKN GREEN GOLD RED BLUE
Fan Blade	Solid Mahogany Wood Blade Metal Blade	WD MTL


TECHNICAL SPECS

Fan Weight	19 lbs
Voltage	110 or 220
Motor Type	AC
Rotation	Yes
Downrods Lengths <i>Field cuttable.</i> <i>Non-threaded</i>	inches: 10, 20, 30, 48, 72 centimeters: 25, 51, 76, 122, 183
Downrod Diameter	.75 inch
Overall Drop	7 inches / 18 cm + downrod length
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.
Ambience	Soothing White Noise
Safety Certification	UL / CUL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Head Options	Solid Mahogany Wood	Metal with Guard
Fan Diameter	44 inches / 112 cm	42 inches / 107 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	796 / 1252	699 / 1101
CFM (Low / High)	2070 / 329	1346 / 2077
Watts (High)	87.32	89.63
CFM/Watt (High)	37.71	23.17
Blade Pitch	19°	31°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm	
Flat ceiling canopy	
Decora-style, 3-speed wall control in white	
OPTIONAL EQUIPMENT	
29° vaulted ceiling mount and canopy	





Matthews Fan Company's customer service and technical assistance are available Monday through Friday, 7AM to 7PM CST, at (847) 680-9043.



www.MatthewsFanCo.com

